


LED LINEAR LIGHTING

2019 V1.0

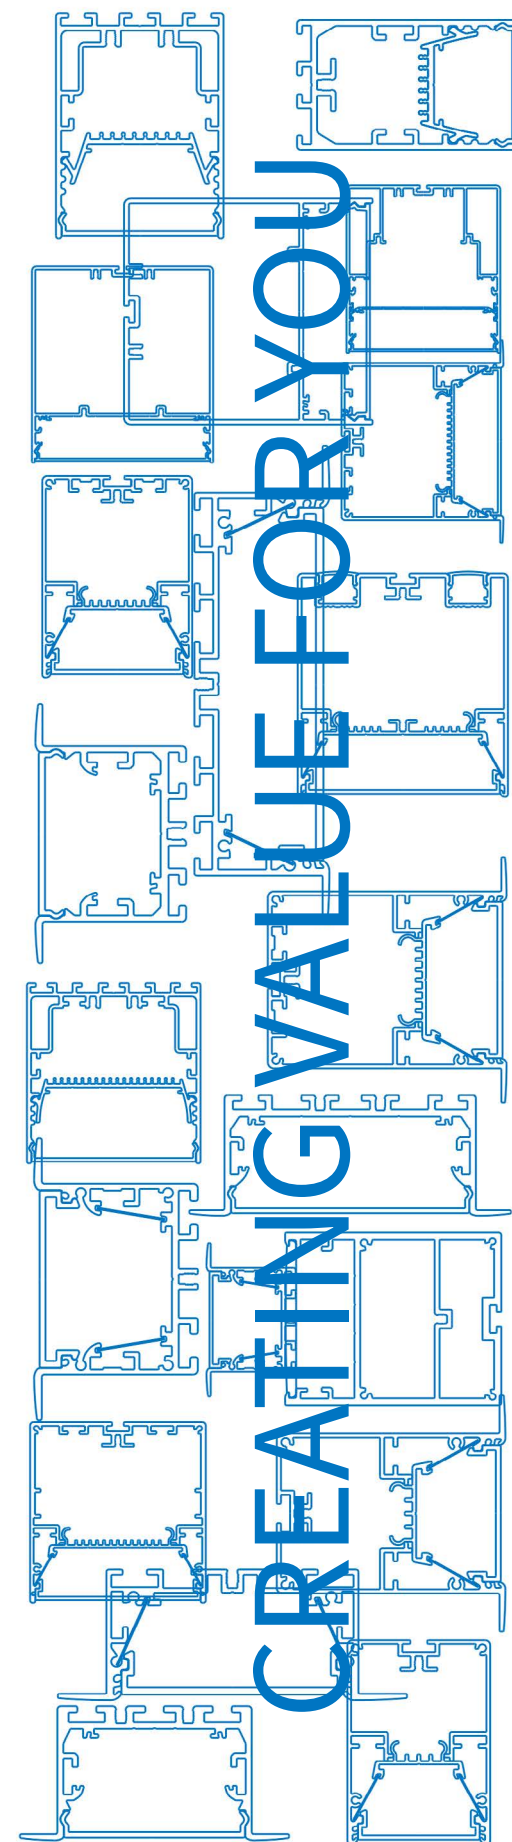

AALIGHT GROUP (HONG KONG) Co., LIMITED.
SHENZHEN AALIGHT TECHNOLOGY CO.,LIMITED.

GLOBAL MARKETING AND R&D CENTER

Room 1110,Excellence HouHai Financial Center,
HaiDe Third Road 1126,NanShan District,
ShenZhen,Guangdong province, China.

POST CODE: 518064

TEL: 0086-755-26652996

FAX: 0086-755-86562751



www.aalights.com

sales@aalights.com

FACTORY ADD

NO.6, HongHu Road, Songshan Industrial Zone,
Bogang Zone, Shajing Street, Baoan District,
Shenzhen,Guangdong province ,China.

POST CODE: 518104

TEL: 0086-755-21503362/27271484


FAX: 0086-755-21503026

LED LINEAR LIGHTING

CONTENTS

04	LED LINEAR LIGHTING			
	LS4265S	LP8090	LS6236S	LS9778S
	LS5270S-II	LS1011S	LS7227S	ART-DL01
	LP6070	LS1112S	LS7270S	
	LS7578S-II	LS1213S	LS9627S	
08	SMART LINEAR LIGHTING SYSTEM			
14	PRODUCT NAMING RULES			
15	ICON DESCRIPTION			
16	FREE LINE			
	LS5186S	LP8085S	LS17023S	LS7236S
	LS6884S	LS5270S	LS6236S-II	LS9636S
	LS15032S	LS7578S	LS6260S	
48	INSTALLATION METHODS			
52	FREE ARC			
	LS3916R	LS3235A		
	LS5390A	LS6070A		
64	INSTALLATION METHODS			
66	PRODUCT LIST			



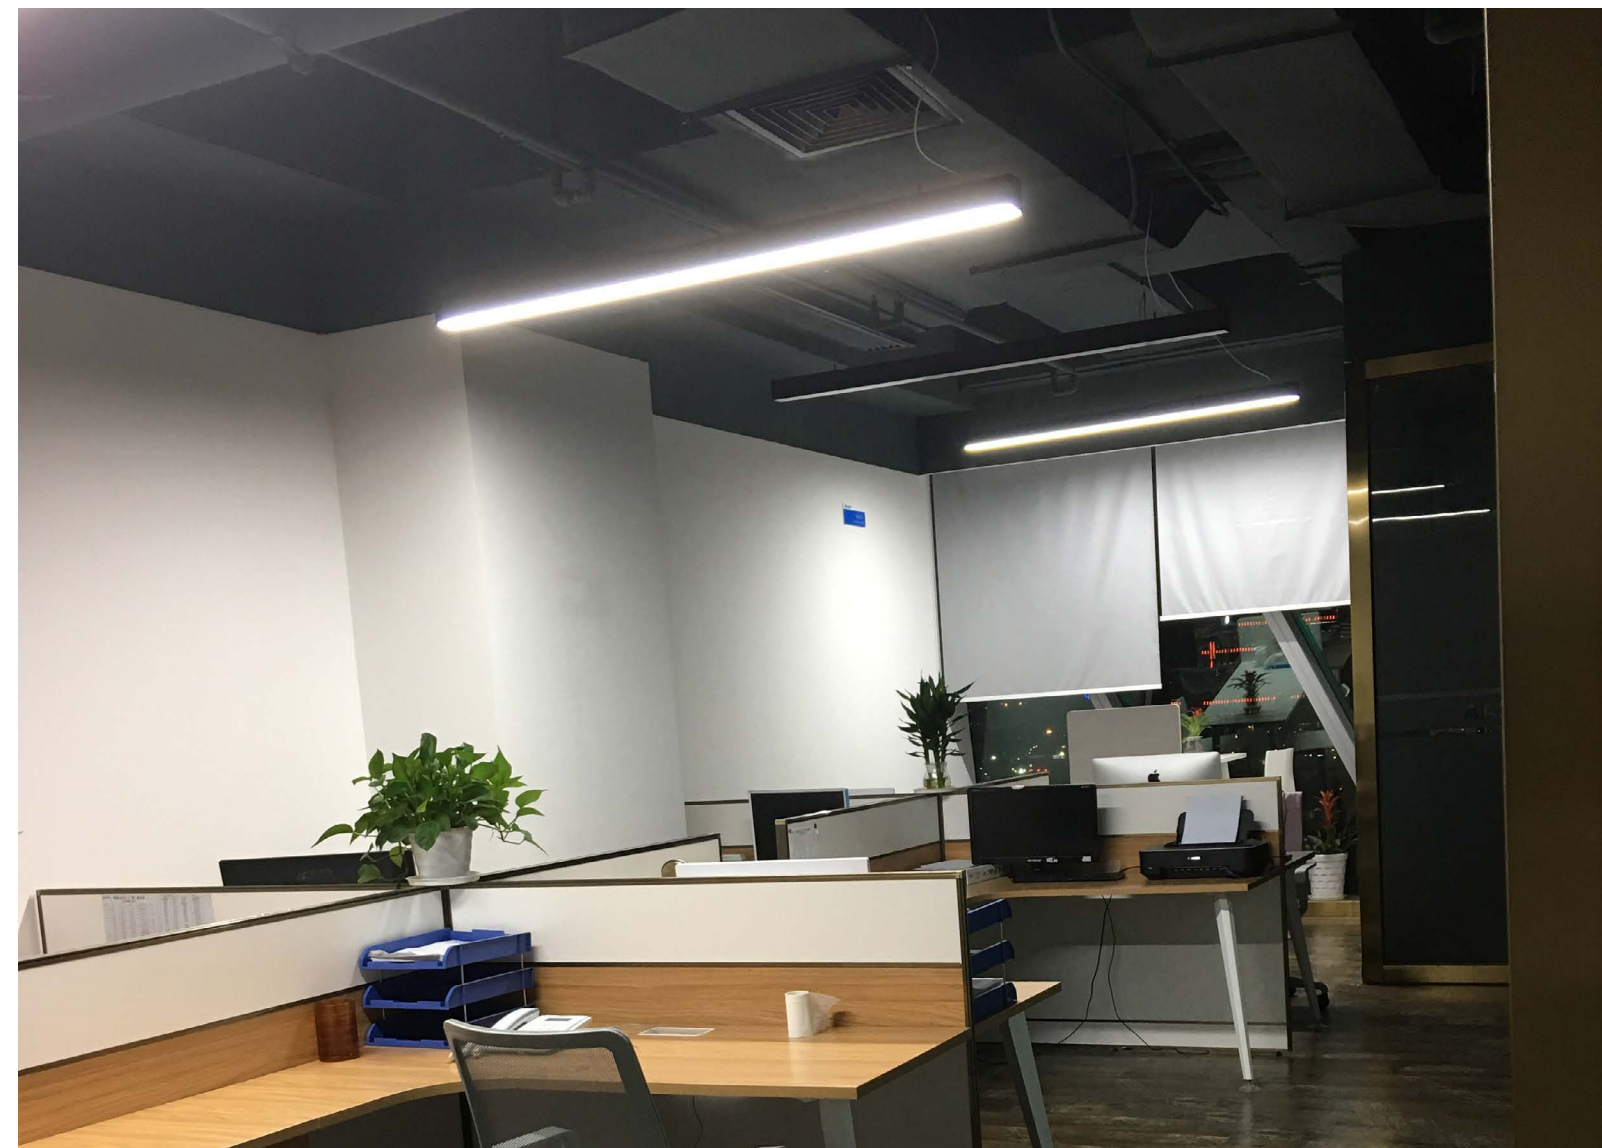

FITO



LS4265S

Pendant LED Linear Lighting



Input	A .Max	Power (W)	SMD	CCT	LM ±10%	CRI	PF
100-240VAC	0.270	30	SMD2835	2800-3200K	2100	>80	>0.9
				3800-4200K	2250		
				4800-5300K	2250		

Material: AL6063-T5
Surface: Anodized/ Painting
Cover: Diffuser /Transparent /Opal
Lighting source width: 23 mm
Available lengths: 0.5-3M
Application: Commercial lighting /Office lighting

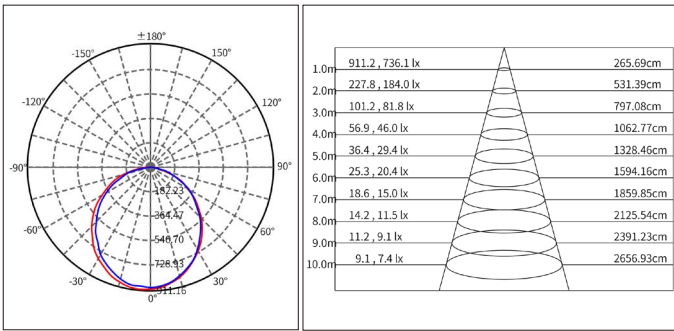

BATO


LS5270S- II

Pendant LED Linear Lighting



Input	A .Max	Power (W)	SMD	CCT	LM ±10%	CRI	PF
100-240VAC	0.216	24	SMD2835	2800-3200K	1680	>80	>0.9
				3800-4200K	1800		
				4800-5300K	1800		

Material: AL6063-T5
Surface: Anodized/ Painting
Cover: Diffuser /Transparent /Opal
Lighting source width: 32 mm
Available lengths: 0.5-2.5M
Application: Commercial lighting /Office lighting

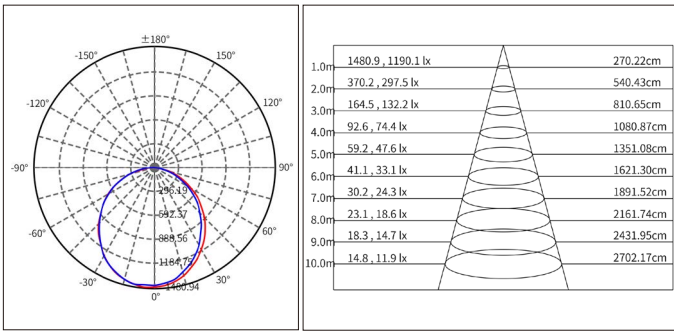

YUTO
LP6070


Pendant LED Linear Lighting



Input	A .Max	Power (W)	SMD	CCT	LM ±10%	CRI	PF
100-240VAC	0.216	24	SMD2835	2800-3200K	1680	>80	>0.9
				3800-4200K	1800		
				4800-5300K	1800		

Material: AL6063-T5
Surface: Anodized/ Painting
Cover: Diffuser / Transparent /Opal
Lighting source width: 10 mm x5pcs
Available lengths: 0.5-3M
Application: Commercial lighting /Office lighting

Silver Black White (ral9016)

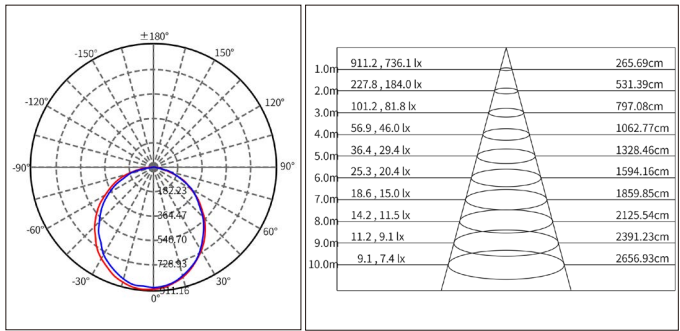

MATO
LS7578S- II


Pendant LED Linear Lighting



Input	A .Max	Power (W)	SMD	CCT	LM ±10%	CRI	PF
100-240VAC	0.360	40	SMD2835	2800-3200K	2800	>80	>0.9
				3800-4200K	3000		
				4800-5300K	3000		

Material: AL6063-T5
Surface: Anodized/ Painting
Cover: Diffuser / Transparent /Opal
Lighting source width: 55 mm
Available lengths: 0.5-3M
Application: Commercial lighting /Office lighting

Silver Black White (ral9016)

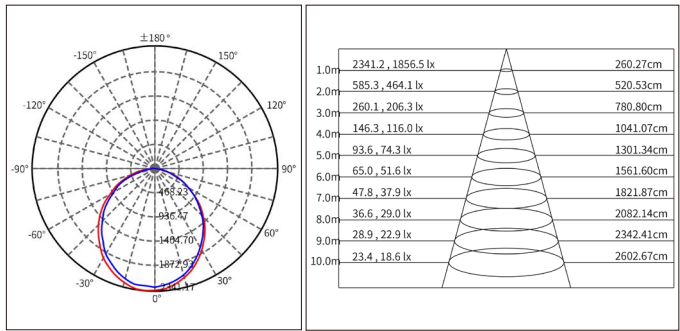

DITO
LP8090 (PATENT PENDING)


Pendant LED Linear Lighting



Input	A .Max	Power (W)	SMD	CCT	LM ±10%	CRI	PF
100-240VAC	0.324	36	SMD2835	2800-3200K	2520	>80	>0.9
				3800-4200K	2700		
				4800-5300K	2700		

Material: AL6063-T5
Surface: Anodized/ Painting
Cover: Diffuser /Transparent /Opal
Lighting source width: 10 mm x5pcs
Available lengths: 0.5-3M
Application: Commercial lighting /Office lighting

Silver Black White (ral9016)

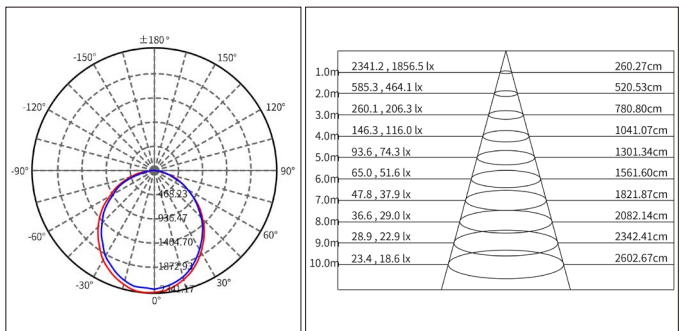

CITO
LS1011S


Pendant LED Linear Lighting



Input	A .Max	Power (W)	SMD	CCT	LM ±10%	CRI	PF
100-240VAC	0.540	60	SMD2835	2800-3200K	4200	>80	>0.9
				3800-4200K	4500		
				4800-5300K	4500		


Material: AL6063-T5
Surface: Anodized/ Painting
Cover: Diffuser /Transparent /Opal
Lighting source width: 76 mm
Available lengths: 0.5-3M
Application: Commercial lighting /Office lighting

Silver Black White (ral9016)

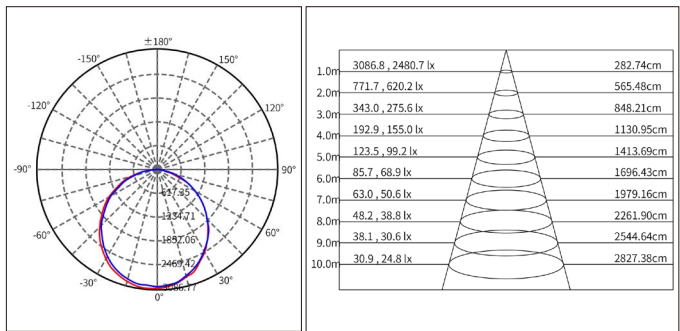

BITO
LS1112S


Pendant LED Linear Lighting

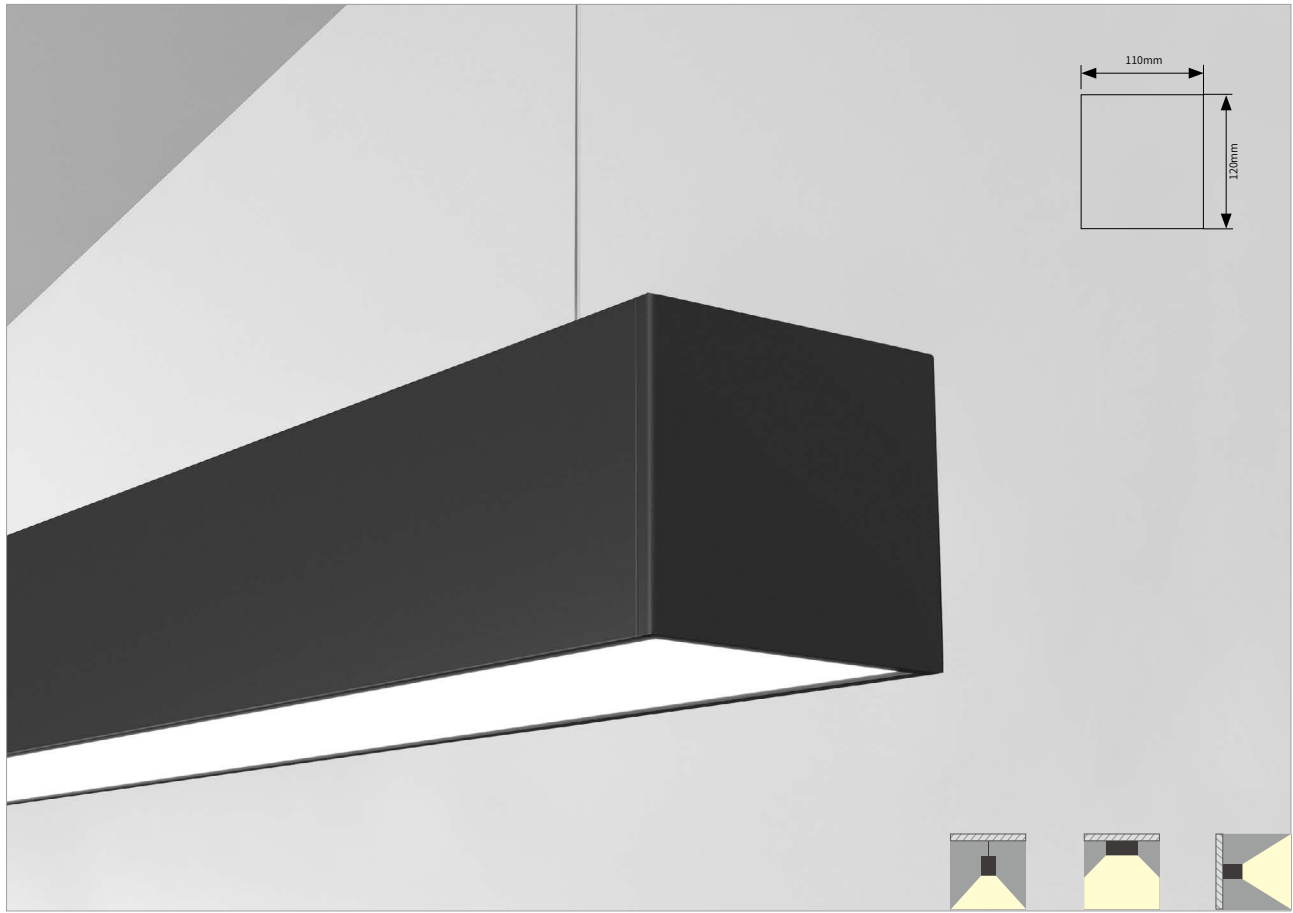

Input	A .Max	Power (W)	SMD	CCT	LM ±10%	CRI	PF
100-240VAC	0.648	72	SMD2835	2800-3200K	5040	>80	>0.9
				3800-4200K	5400		
				4800-5300K	5400		

Material: AL6063-T5
Surface: Anodized/ Painting
Cover: Diffuser /Transparent /Opal
Lighting source width: 88 mm
Available lengths: 0.5-2.5M
Application: Commercial lighting /Office lighting

Silver Black White (ral9016)

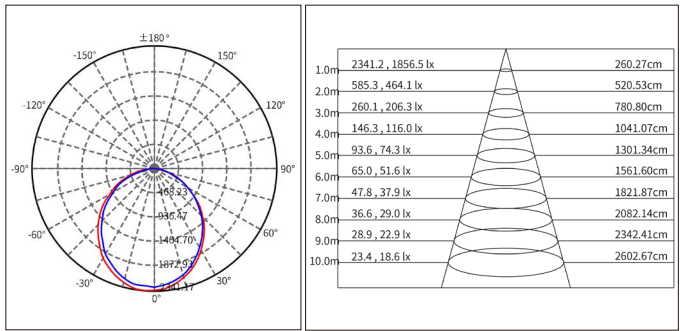

AITO
LS1213S


Pendant LED Linear Lighting



Input	A .Max	Power (W)	SMD	CCT	LM ±10%	CRI	PF
100-240VAC	0.648	72	SMD2835	2800-3200K	5040	>80	>0.9
				3800-4200K	5400		
				4800-5300K	5400		


Material: AL6063-T5
Surface: Anodized/ Painting
Cover: Diffuser /Transparent /Opal
Lighting source width: 97 mm
Available lengths: 0.5-2.5M
Application: Commercial lighting /Office lighting

Silver Black White (ral9016)

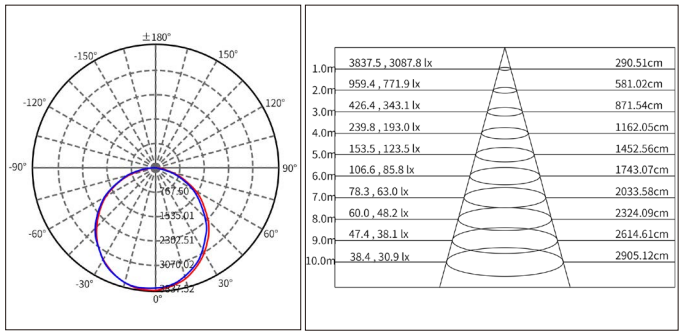

SURO
LS6236S


Recessed LED Linear Lighting

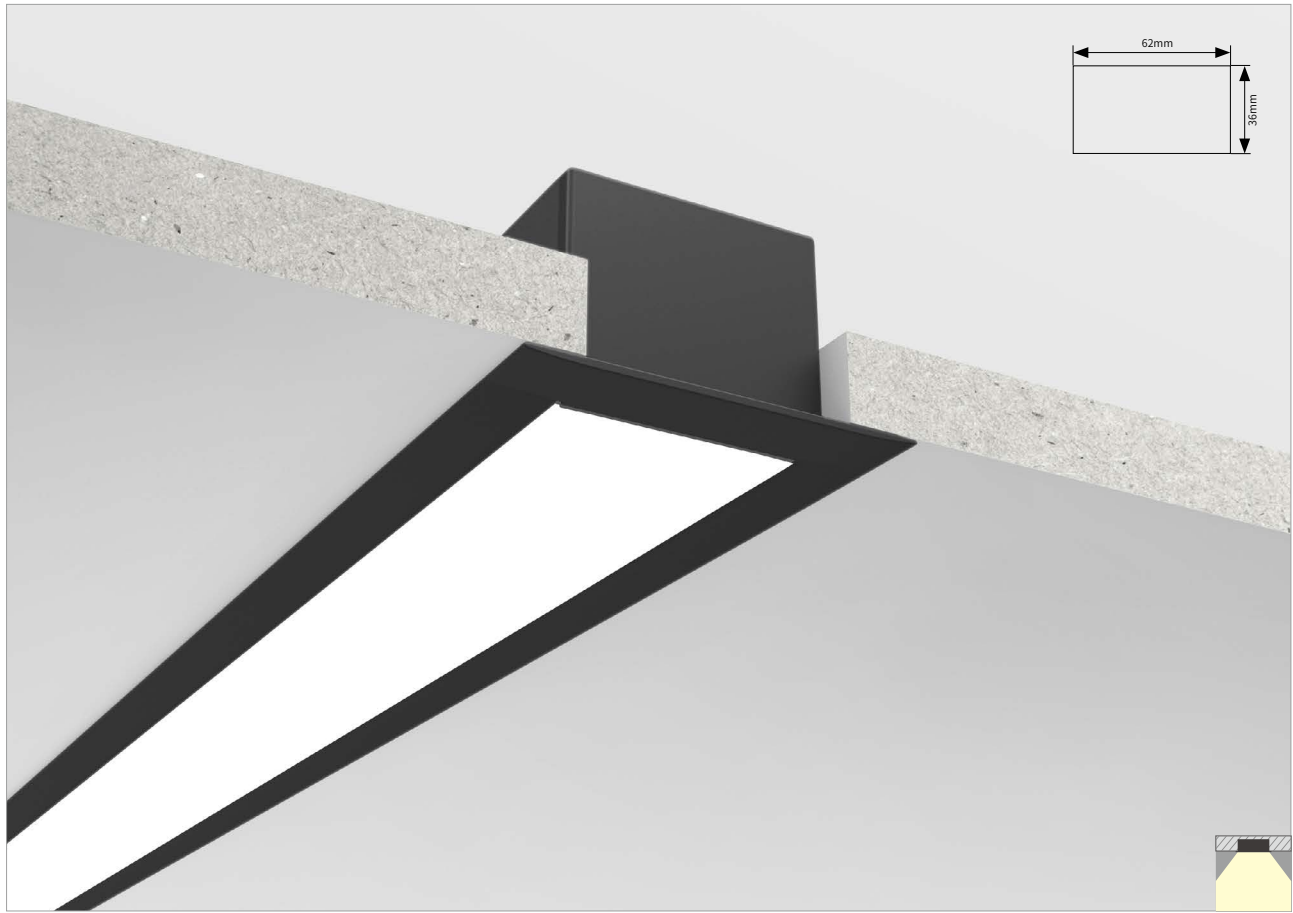

Input	A .Max	Power (W)	SMD	CCT	LM ±10%	CRI	PF
100-240VAC	0.216	24	SMD2835	2800-3200K	1680	>80	>0.9
				3800-4200K	1800		
				4800-5300K	1800		


Material: AL6063-T5
Surface: Anodized/ Painting
Cover: Diffuser /Transparent /Opal
Lighting source width: 20 mm
Available lengths: 0.5-3M
Application: Commercial lighting /Office lighting

Silver Black White (ral9016)

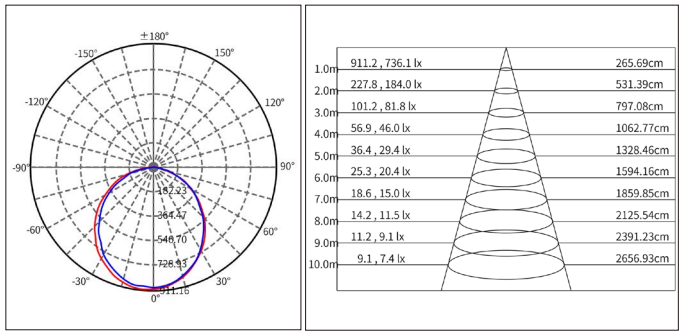

TURO
LS7227S


Recessed LED Linear Lighting

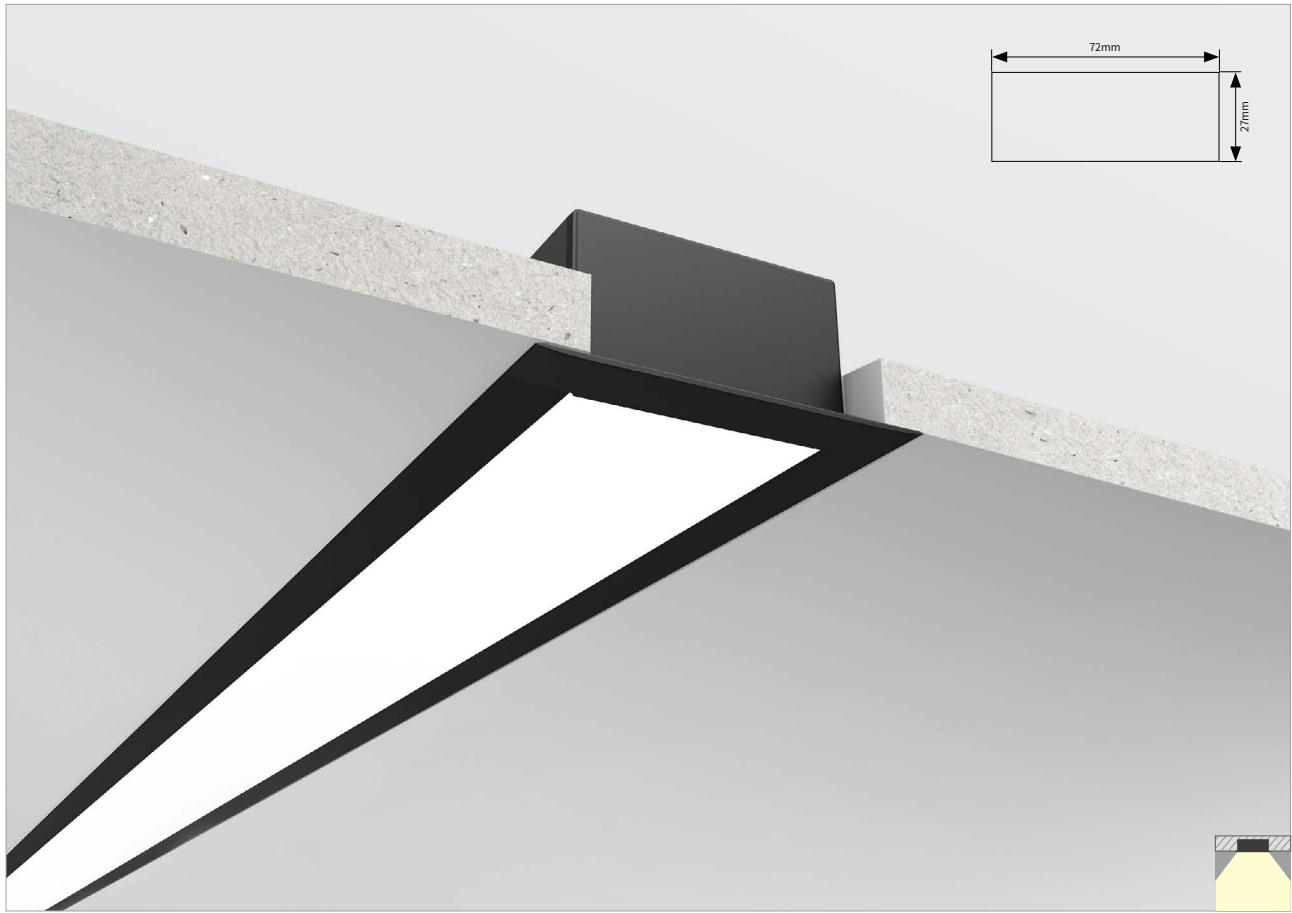

Input	A .Max	Power (W)	SMD	CCT	LM ±10%	CRI	PF
100-240VAC	0.108	12	SMD2835	2800-3200K	840	>80	>0.9
				3800-4200K	900		
				4800-5300K	900		

Material: AL6063-T5
Surface: Anodized/ Painting
Cover: Diffuser /Transparent /Opal
Lighting source width: 32 mm
Available lengths: 0.5-3M
Application: Commercial lighting /Office lighting


Silver Black White (ral9016)

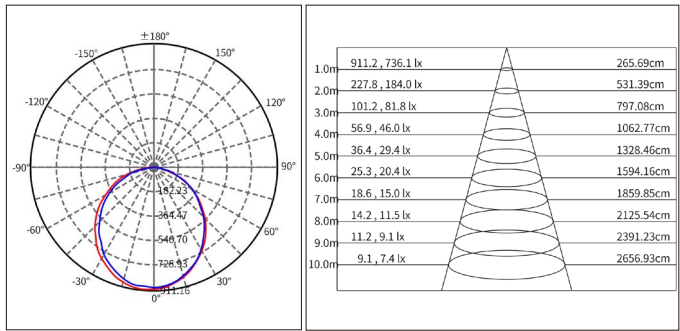

HARO

LS7270S


Recessed LED Linear Lighting

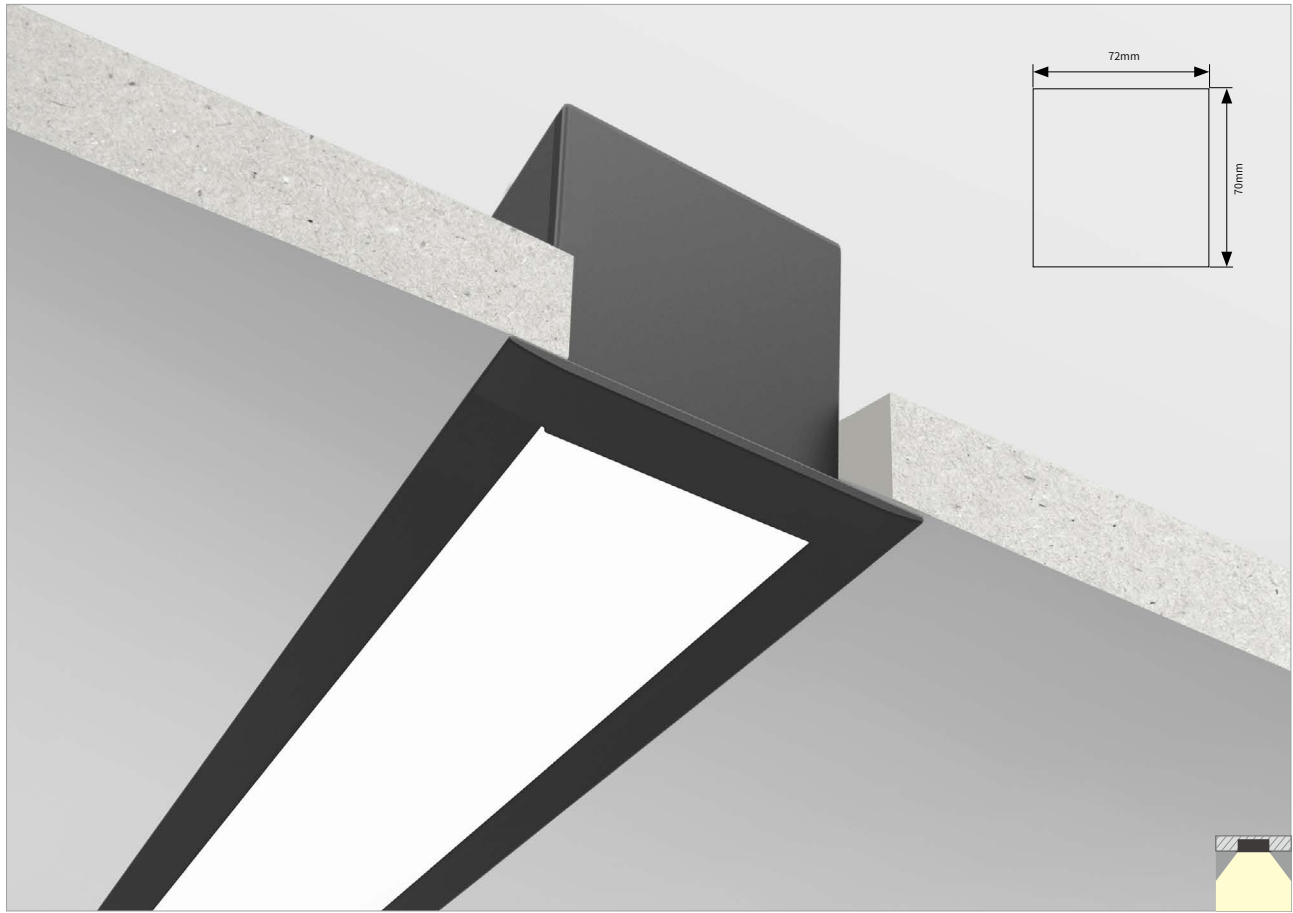

Input	A .Max	Power (W)	SMD	CCT	LM ±10%	CRI	PF
100-240VAC	0.270	30	SMD2835	2800-3200K	2100	>80	>0.9
				3800-4200K	2250		
				4800-5300K	2250		

Material: AL6063-T5
Surface: Anodized/ Painting
Cover: Diffuser /Transparent /Opal
Lighting source width: 23 mm
Available lengths: 0.5-3M
Application: Commercial lighting /Office lighting


Silver Black White (ral9016)

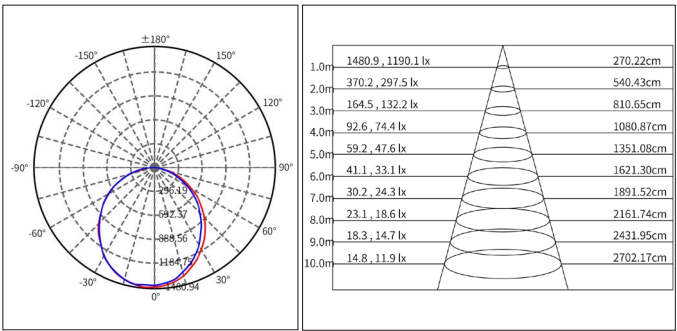

HURO

LS9627S


Recessed LED Linear Lighting

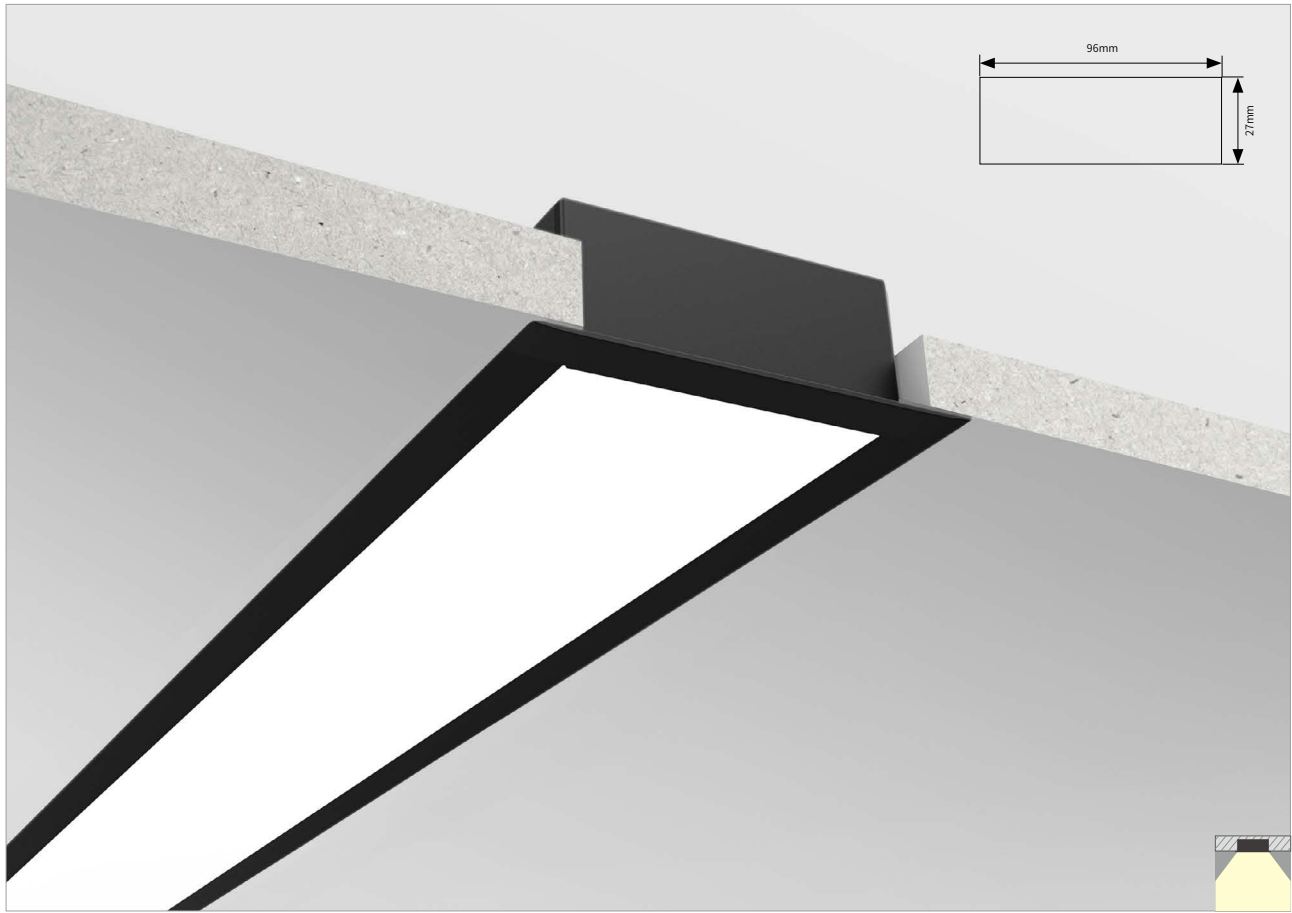

Input	A .Max	Power (W)	SMD	CCT	LM ±10%	CRI	PF
100-240VAC	0.180	20	SMD2835	2800-3200K	1400	>80	>0.9
				3800-4200K	1500		
				4800-5300K	1500		


Material: AL6063-T5
Surface: Anodized/ Painting
Cover: Diffuser /Transparent /Opal
Lighting source width: 55 mm
Available lengths: 0.5-3M
Application: Commercial lighting /Office lighting

Silver Black White (ral9016)

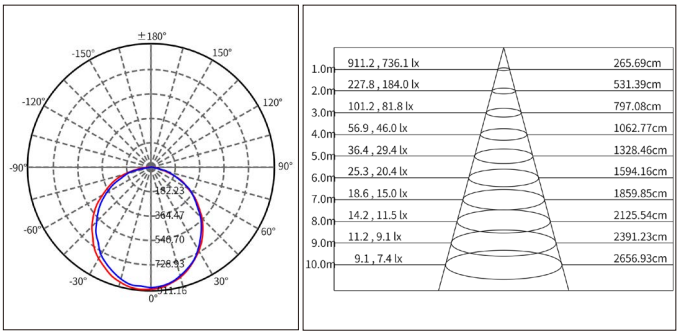

CARO
LS9778S


Recessed LED Linear Lighting

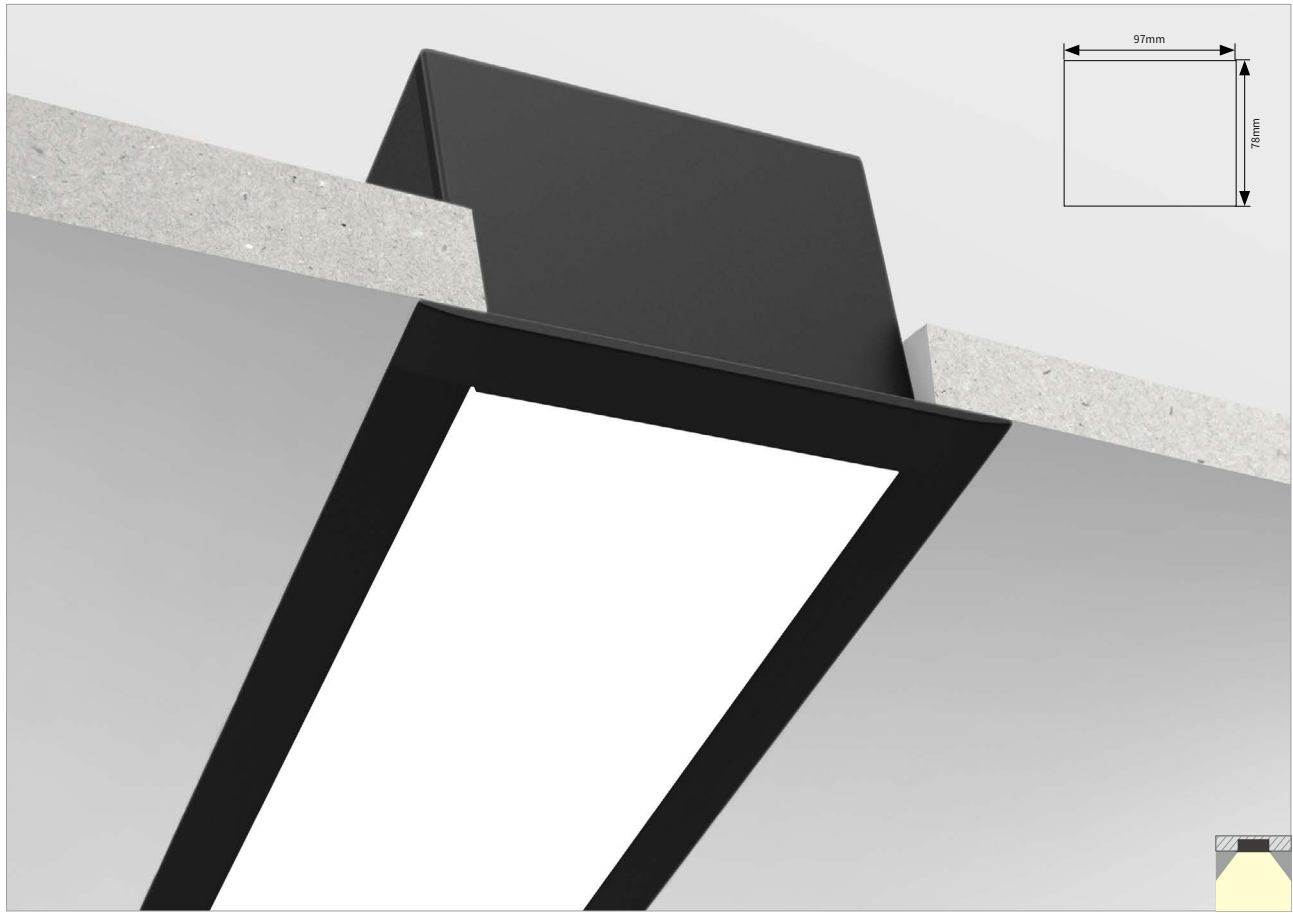

Input	A .Max	Power (W)	SMD	CCT	LM ±10%	CRI	PF
100-240VAC	0.360	40	SMD2835	2800-3200K	2800	>80	>0.9
				3800-4200K	3000		
				4800-5300K	3000		


Material: AL6063-T5
Surface: Anodized/ Painting
Cover: Diffuser /Transparent /Opal
Lighting source width: 55 mm
Available lengths: 0.5-3M
Application: Commercial lighting /Office lighting

Silver Black White (ral9016)

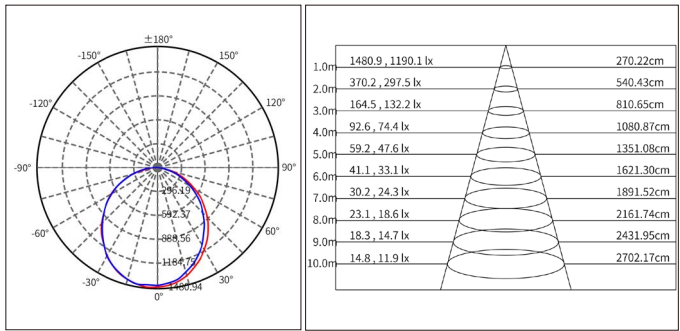

DREAM LIGHT
ART-DL-01


Pendant LED Linear Lighting

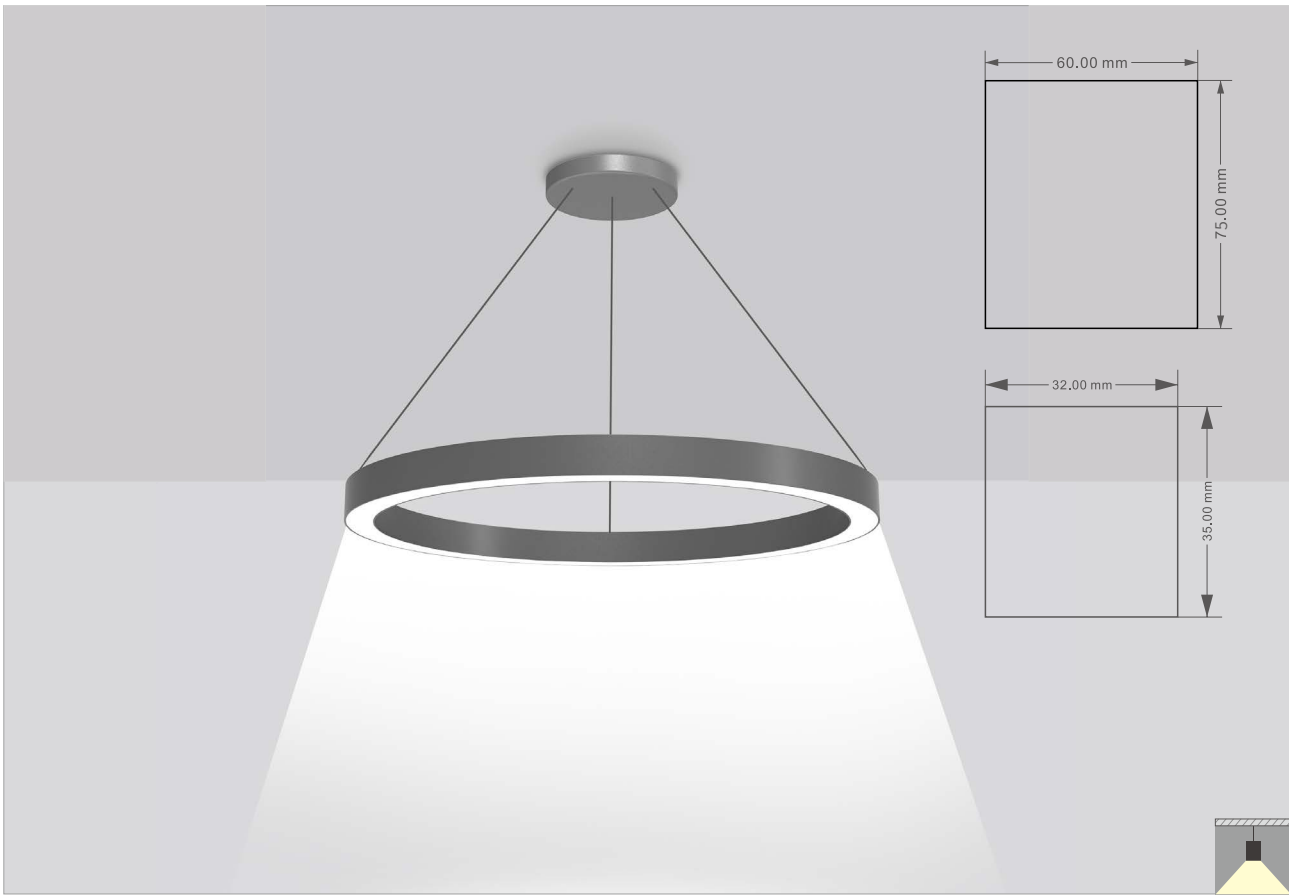


Model	Size	Power	CCT	CRI	lm	LED	Input	PF	Beam angle
LS3235A- II	Ø 0.6m	18W	3000/4000K	> 80	1260	50/60HZ LED2835	100-240V	>0.9	120
	Ø 0.8m	24W			1680				
	Ø 1.0m	30W			2100				
	Ø 1.2m	36W			2520				
LS6070A- II	Ø 1.0m	60W			4200				
	Ø 1.2m	72W			5040				

Material: AL6063-T5
Surface: Anodized/ Painting
Cover: Diffuser /Transparent /Opal
Lighting source width: 60 mm
Available lengths: 0.5-3M
Application: Commercial lighting /Office lighting

Silver Black White (ral9016)

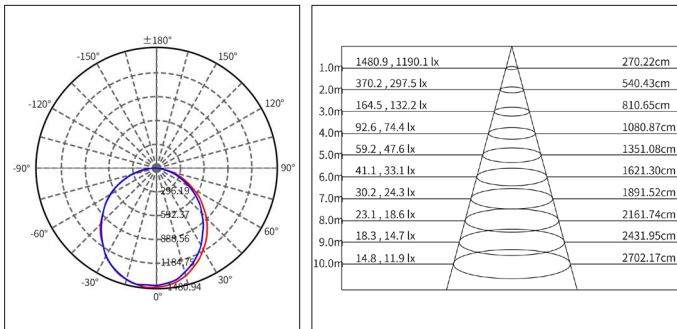



SMART LINEAR LIGHTING SYSTEM 2.0

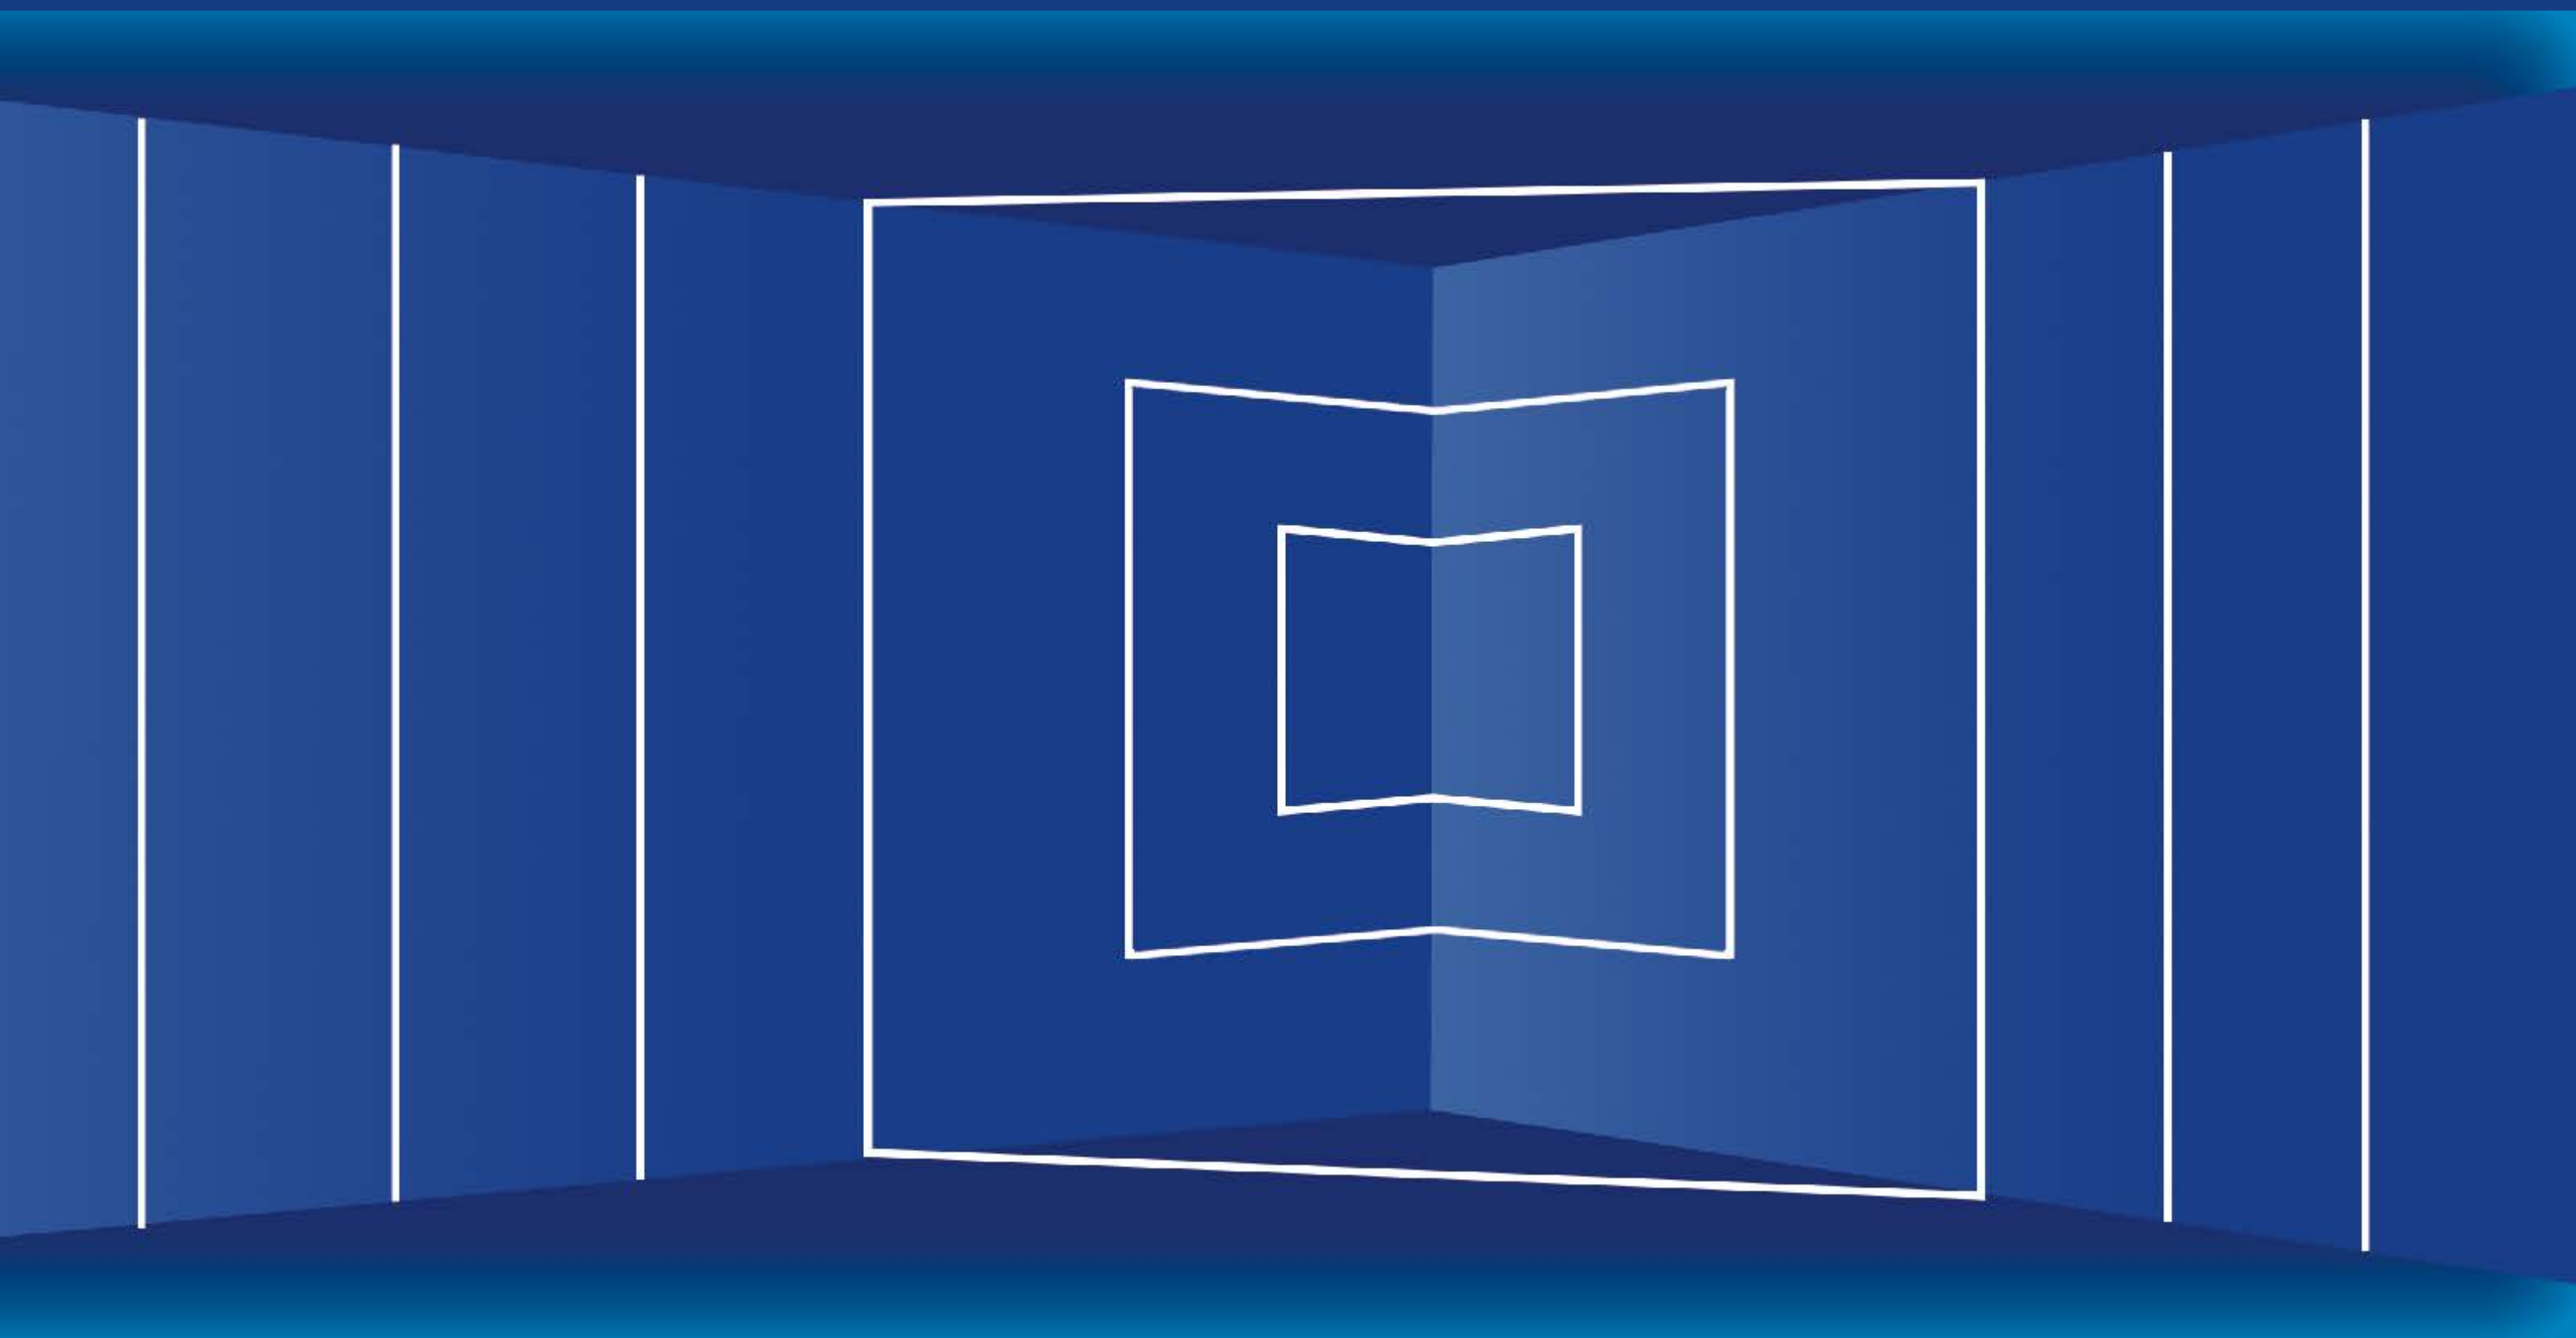





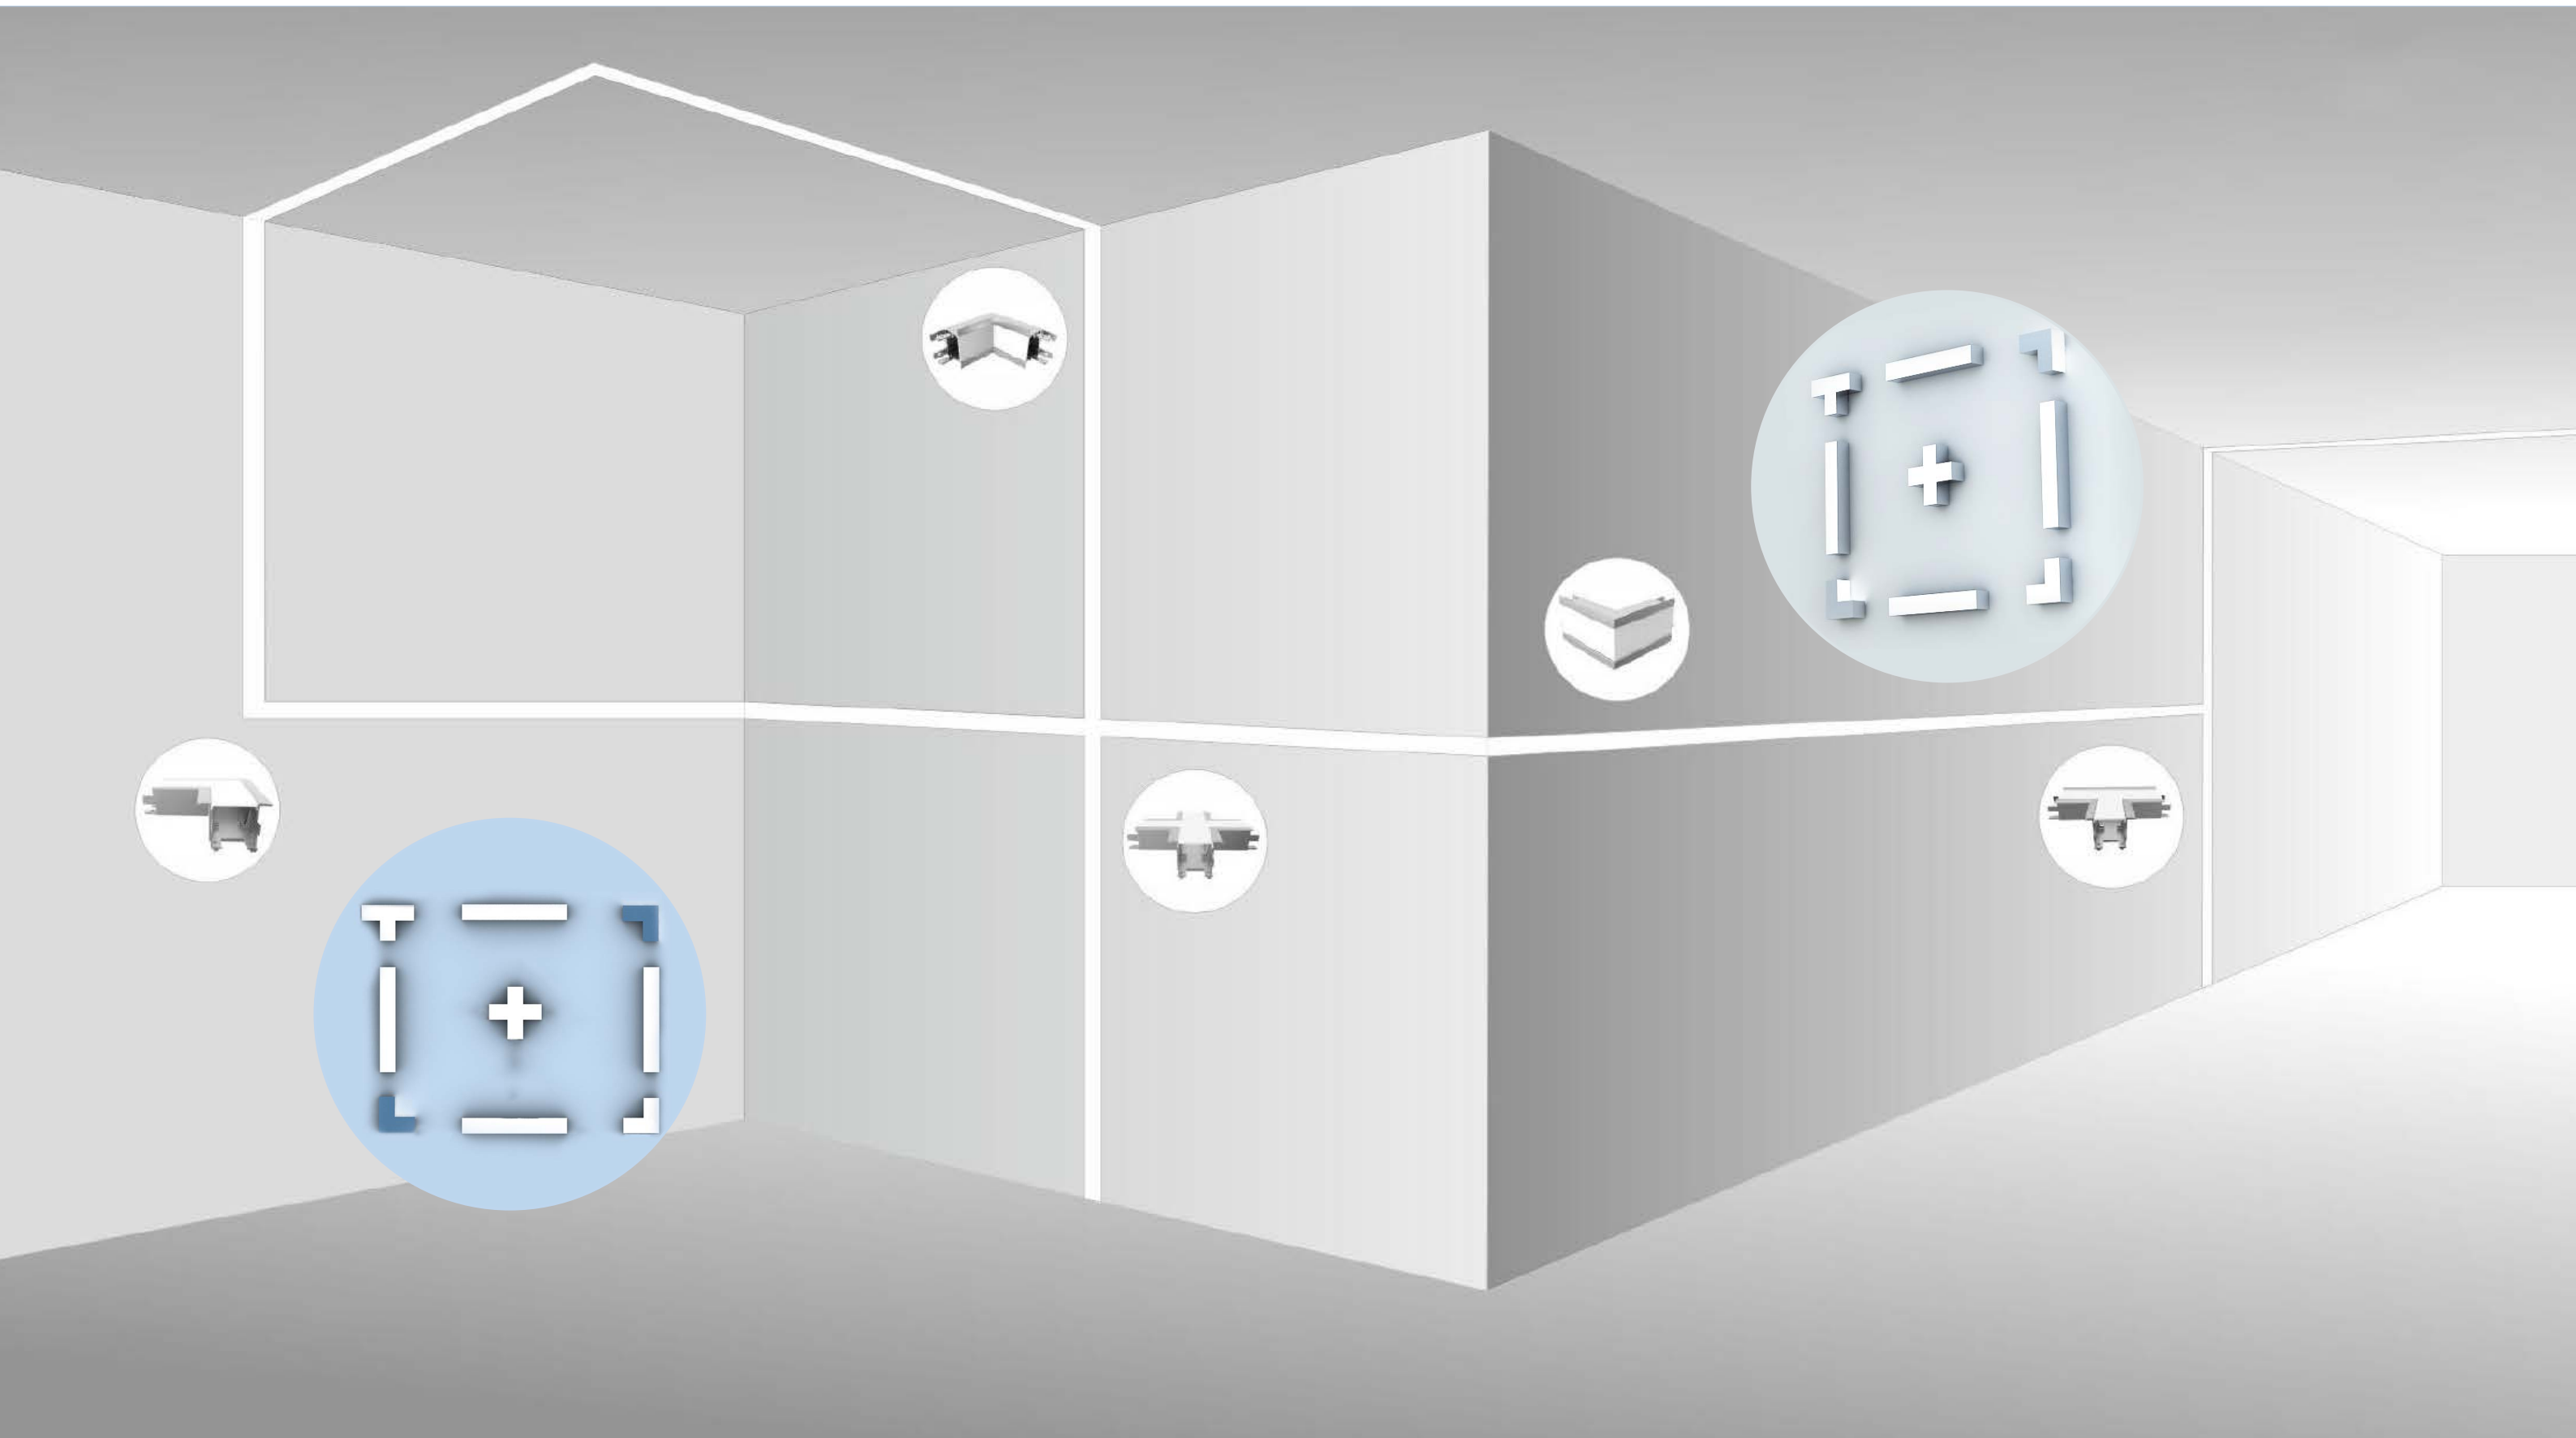

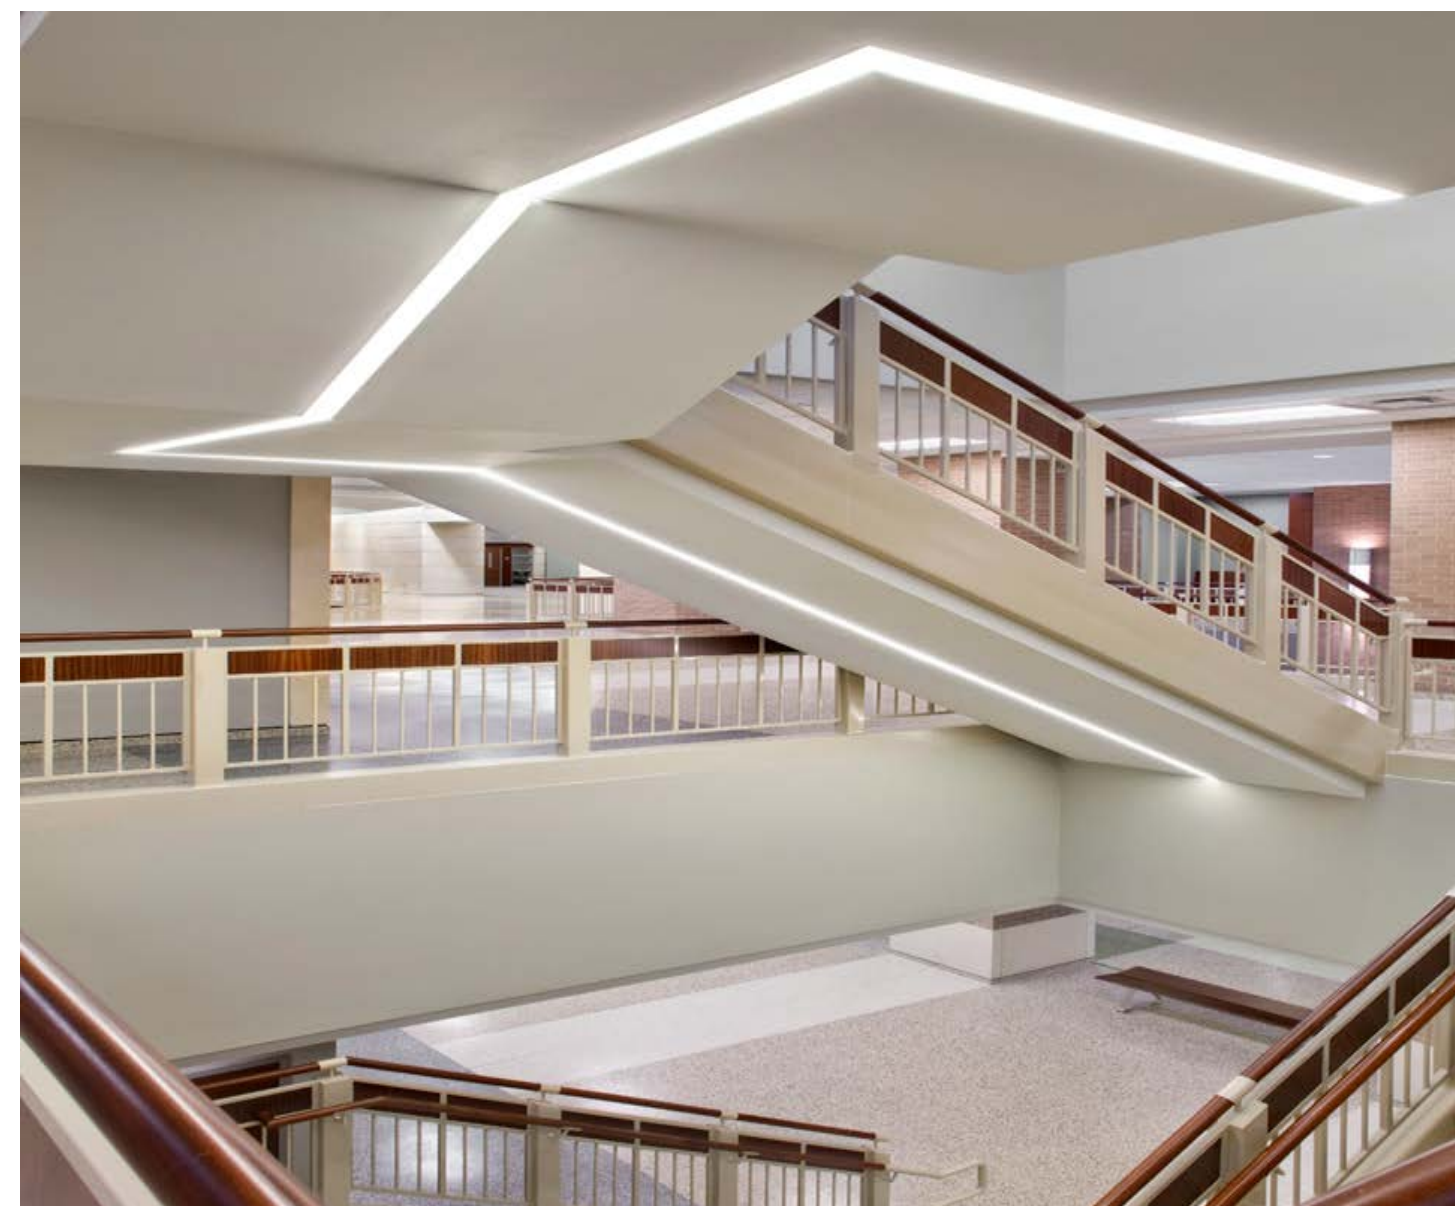

SMART LINEAR LIGHTING SYSTEM 2.0


Smart linear lighting system, A linear lighting system based on Intelligent control scheme.

SLLS 2.0 The system not only covers the design of freedom, simplicity, fashionable, Also contains the intelligent control for building lighting environment and the lighting environment design of art.

At the same time, the system is divided into two series which is Linear lighting system and Arc lighting system.

Free Line series : Can creating a sense of time, sense of space.
Free Arc series: Can creating a sense of soft feeling, a sense of freedom. They can strengthening the interior light environment atmosphere .

The Birth of SLLS 2.0, designed to bring comfortable, bright and artistic charm to the world .

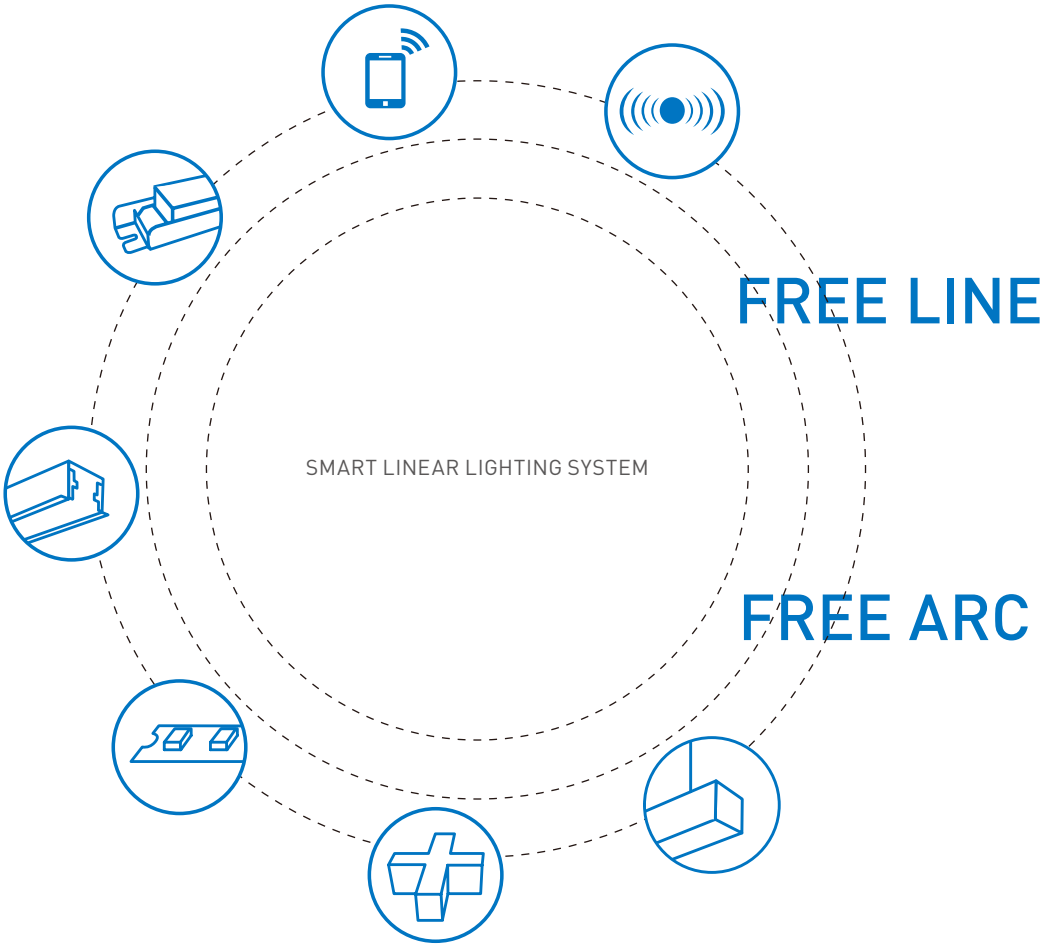

SMART LINEAR LIGHTING SYSTEM

SMART

- ① Internal / external dimming driver
- ② Constant voltage / constant current
- ③ 0/1-10V, DALI, Push-Dim, IR Control dimming, Smart sensor
- ④ Bluetooth, Wireless access control, installation without add new wires
- ⑤ Building overall/partition dimming, luminous environment intelligent control

LINEAR


- ① End cap easy installation without screws
- ② Light leakage proof
- ③ Modular assembly design
- ④ Integrated dimmer installation
- ⑤ Convenient and efficient installation experience
- ⑥ Smart seamless connector



SMART LINEAR LIGHTING SYSTEM


LIGHTING

- ① PCB/FPC two types of models can be selected
- ② Constant current can be spliced
- ③ Constant voltage can be cutting
- ④ Efficiency> 120 lm/W
- ⑤ SDCM <3
- ⑥ Ra>80、Ra>90 (R9>0)

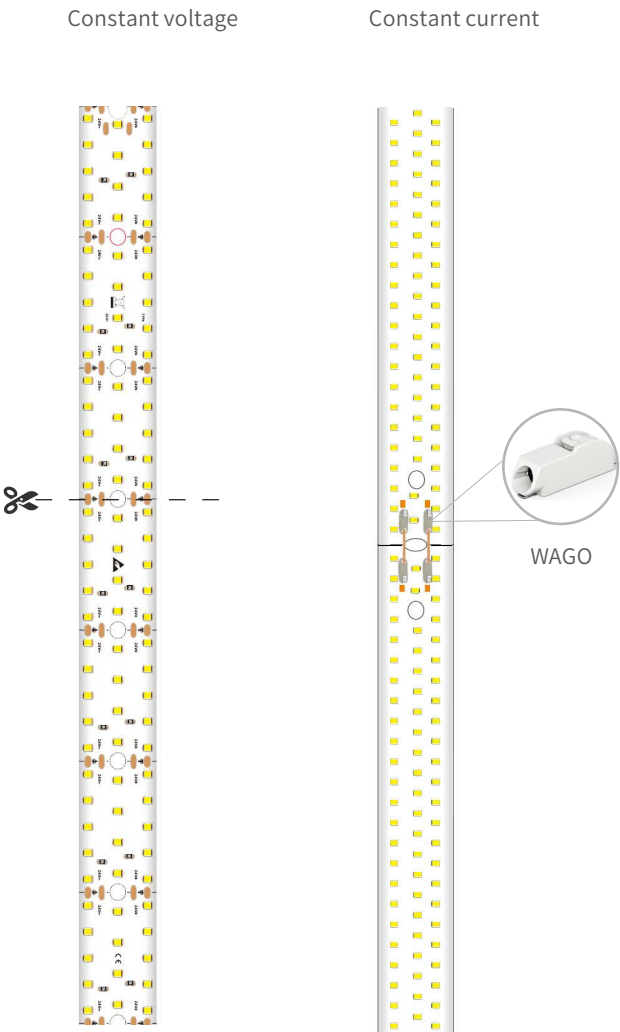

SYSTEM

- ① Multi-corner connector
- ② Flexible selling mode
- ③ 0/1-10 V, DALI, Push - Dim, IR Control dimming、smart sensor
- ④ Wireless access control, installation without add new wires
- ⑤ Building overall/partition dimming, luminous environment intelligent control
- ⑥ Smart seamless connector

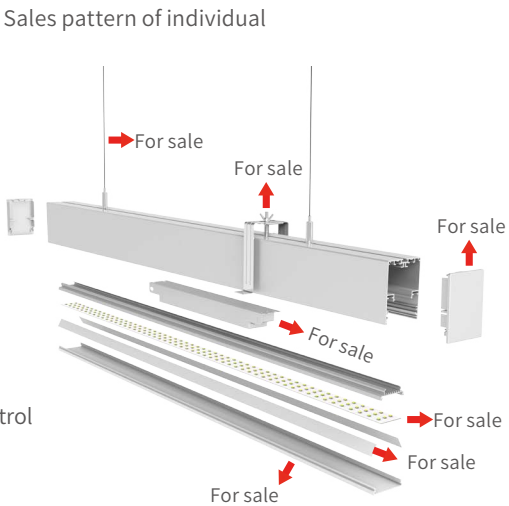

Sales pattern of finished luminaire



PRODUCT NAMING RULES

LS-XXXX-X-X

LS Smart Linear Lighting System

XXXX Size
3560: wide 35mm,high 60mm

X Profile shape
S: Straight A: Arc

X Second generation


ps: LS3560S- II
Smart Linear Lighting System; wide 35mm * high 60mm; Straight ; Second generation

ICON DESCRIPTION


Pendant




Surface mounted

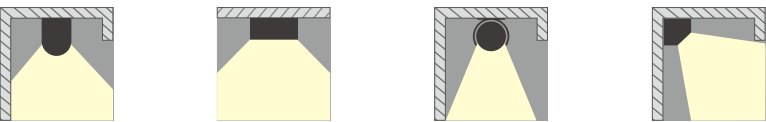


Wall mounted




Recessed



FREE LINE

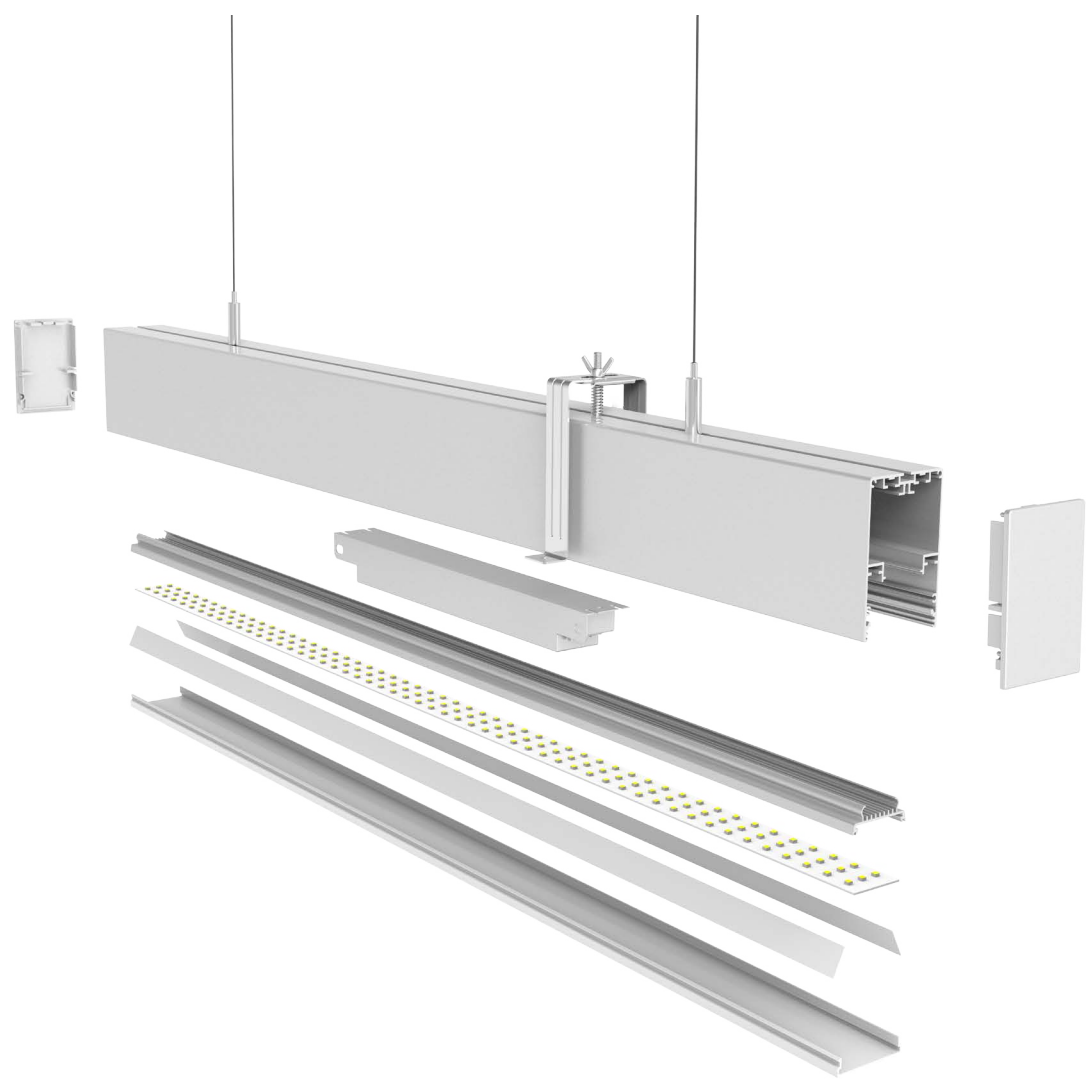

COSMO COLIN

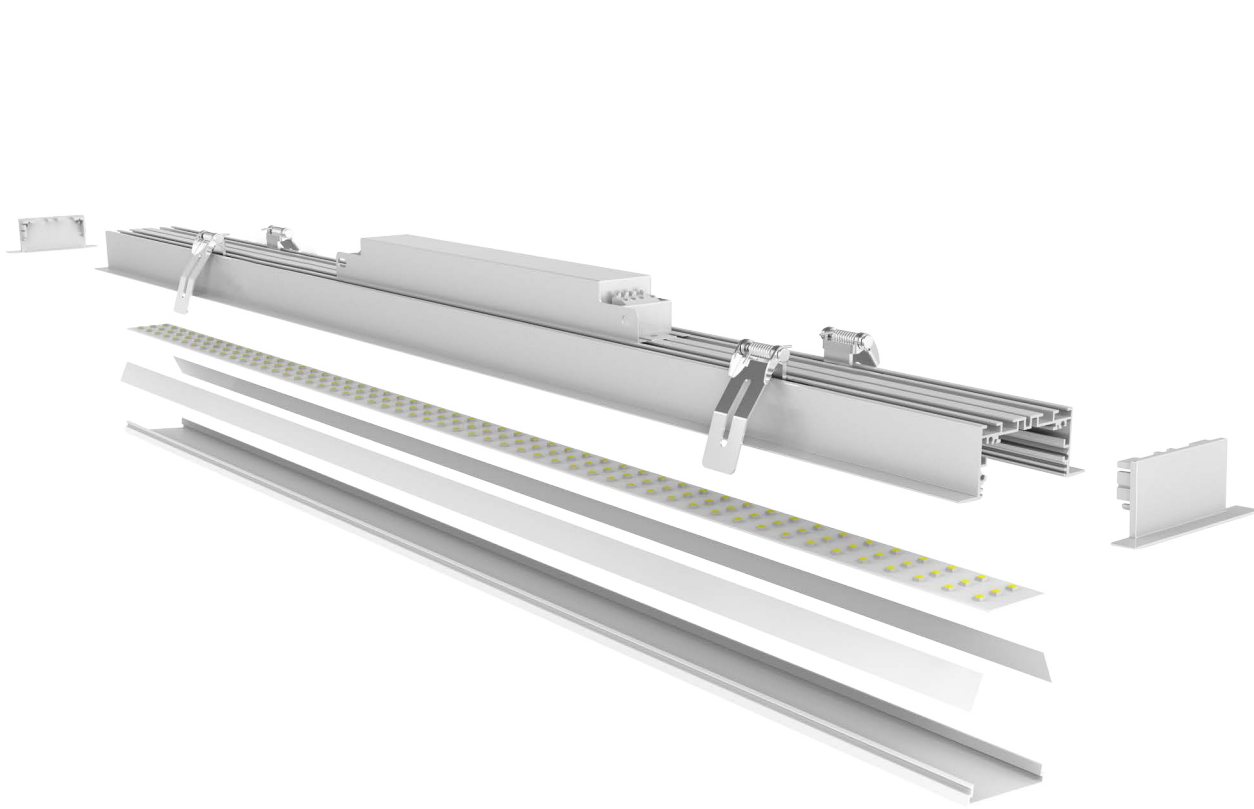




JUTO

LS5186S





	Silver		Black		White (ral9016)
Material:		AL6063-T5			
Surface:		Anodized/ Painting			
Cover:		Diffuser /Transparent /Opal			
Power:		40 W/m			
Lamp beads:		240LEDs/m (2835)			
Lighting source width:		32 mm			
Available lengths:		0.5-3M			
Application:		Commercial lighting /Office lighting			

Unit: mm



Match with(1.0/1.2/1.5/1.8/2.0/2.5/3.0m) length of luminaire
NJG-32X500X1 12C10B

PCB-Constant current
Power: 40W/m
Width: 0.032m
length: 0.49m/pcs

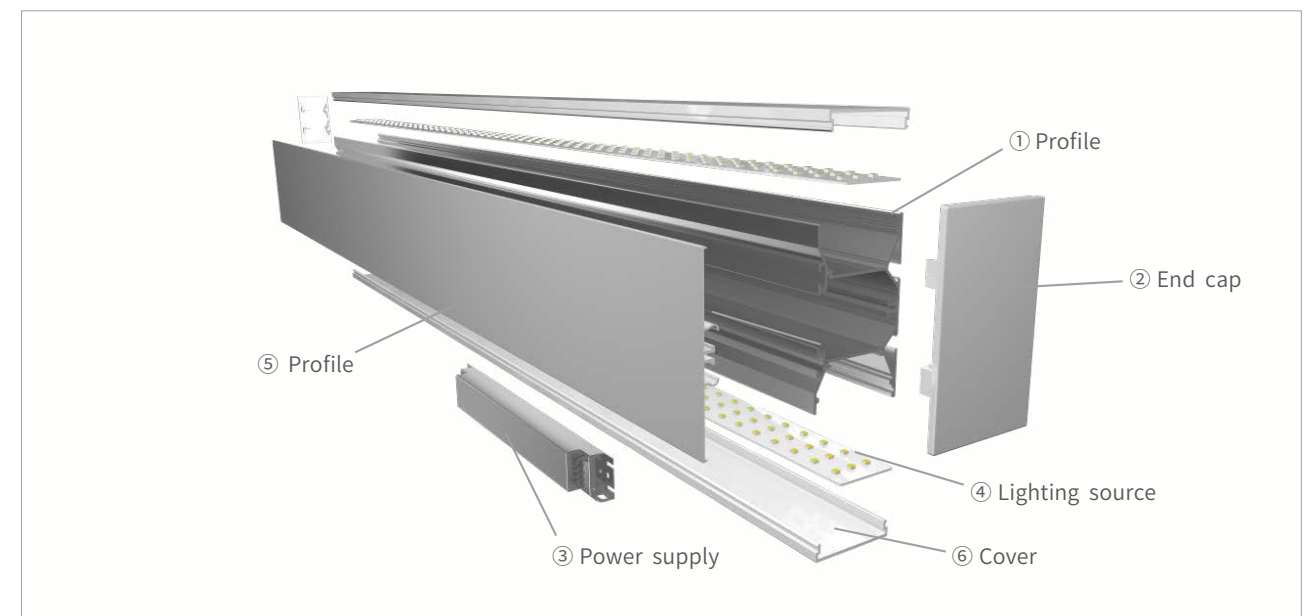


RUTO
LS6884S





	Silver		Black		White (ral9016)
Material: AL6063-T5					
Surface: Anodized/ Painting					
Cover: Diffuser /Transparent /Opal					
Power: 40 W/m					
Lamp beads: 240LEDs/m (2835)					
Lighting source width: 32 mm					
Available lengths: 0.5-3M					
Application: Commercial lighting /Office lighting					



Unit: mm



Match with(1.0/1.2/1.5/1.8/2.0/2.5/3.0m) length of luminaire
NJG-32X500X1 12C10B

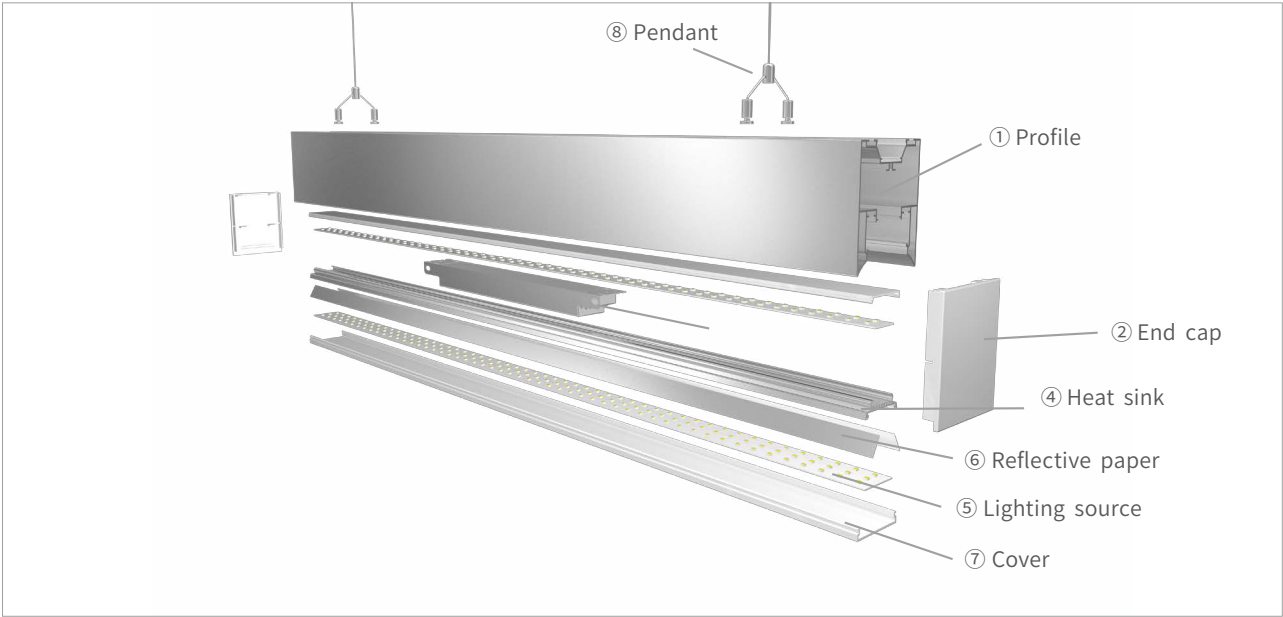


YOTO
LS15032S





	Silver		Black		White (ral9016)
Material: AL6063-T5					
Surface: Anodized/ Painting					
Cover: Diffuser /Transparent /Opal					
Power: 40 W/m					
Lamp beads: 210LEDs/m (2835)					
Lighting source width: 50 mm					
Available lengths: 0.5-3M					
Application: Commercial lighting /Office lighting					



Unit: mm





Match with(1.0/1.2/1.5/1.8/2.0/2.5/3.0m) length of luminaire
NJG-V8420-50

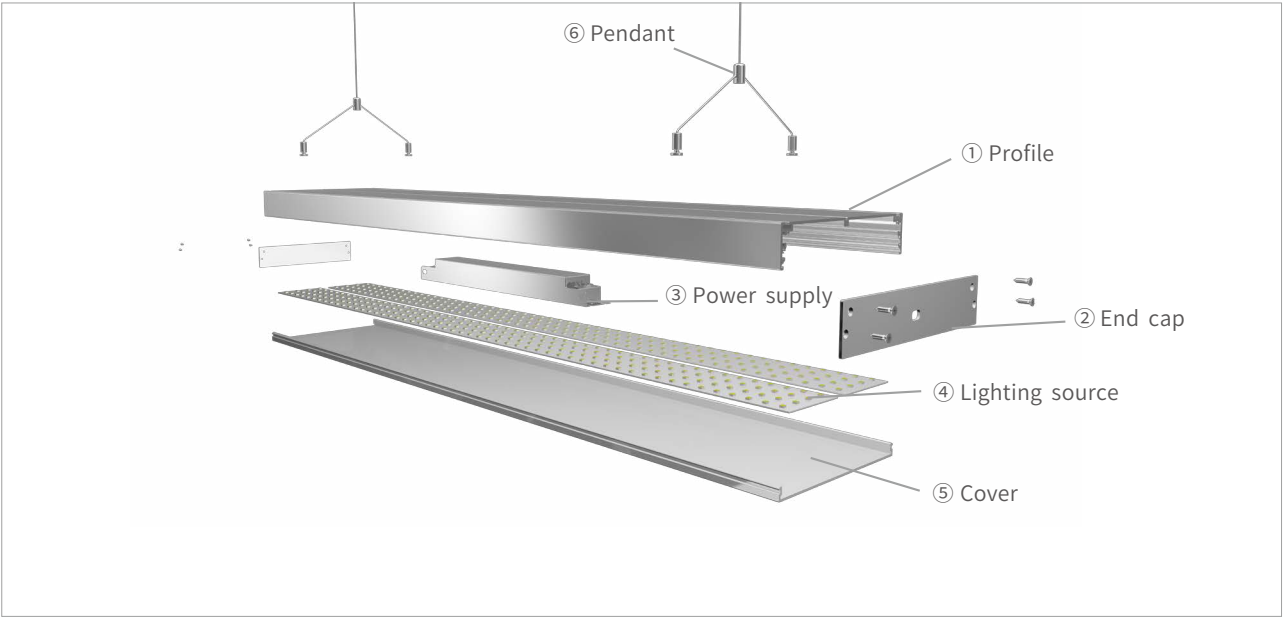



DATO
LP8085S



	Silver		Black		White (ral9016)
Material: AL6063-T5					
Surface: Anodized/ Painting					
Cover: Diffuser /Transparent /Opal					
Power: 60 W/m					
Lamp beads: 500LEDs/m (2835)					
Lighting source width: 60 mm					
Available lengths: 0.5-3M					
Application: Commercial lighting /Office lighting					

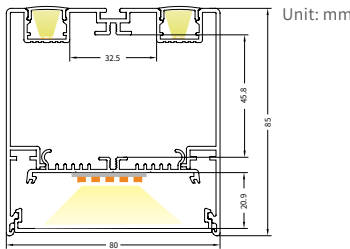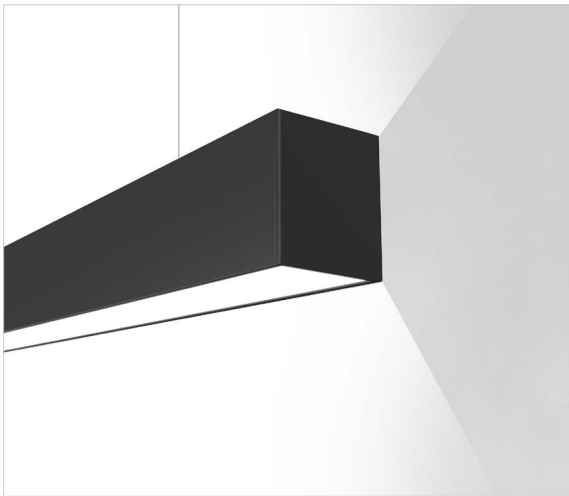


Match with (1.0/1.2/1.5/1.8/2.0/2.5/3.0m) length of luminair e
NJG-60X500 12C20B

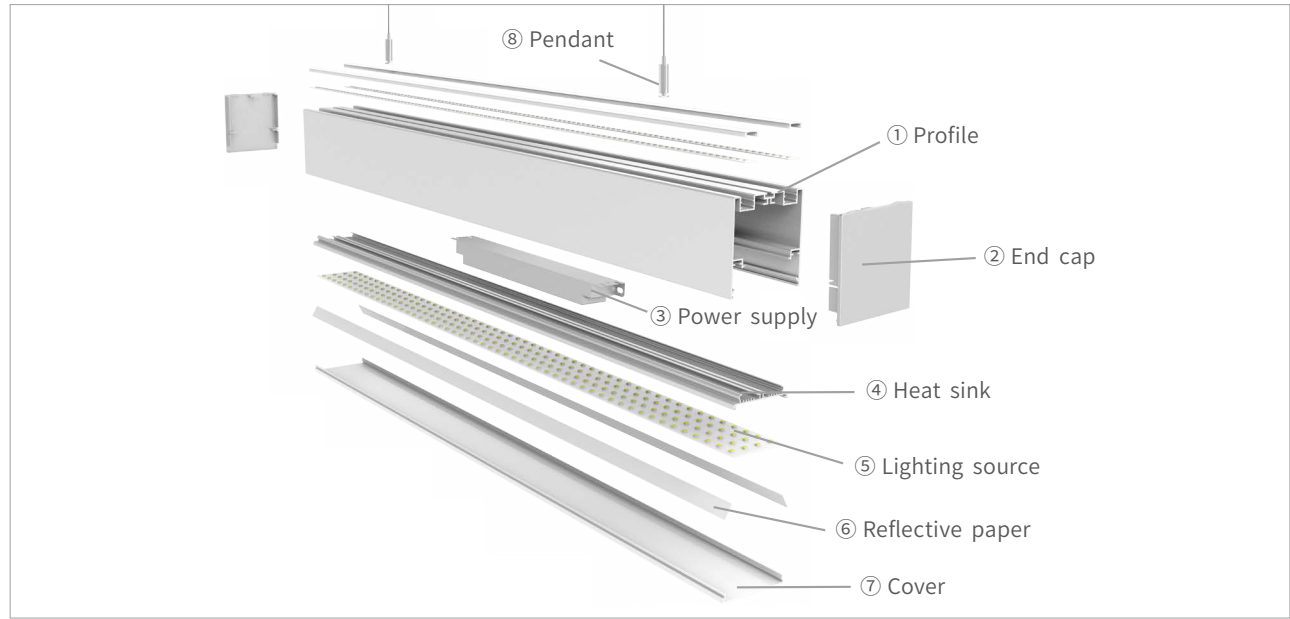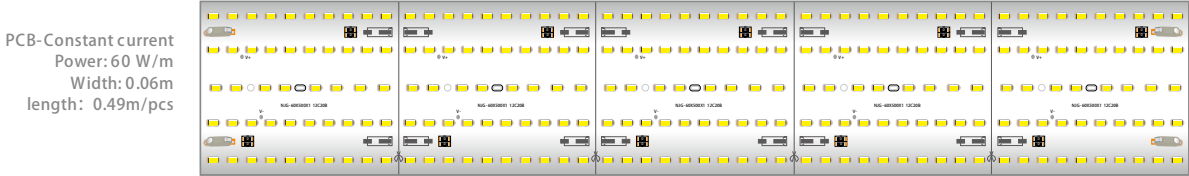



BATO
LS5270S




	Silver		Black		White (ral9016)
Material: AL6063-T5					
Surface: Anodized/ Painting					
Cover: Diffuser /Transparent /Opal					
Power: 28 W/m					
Lamp beads: 243LEDs/m (2835)					
Lighting source width: 32 mm					
Available lengths: 0.5-2.5M					
Application: Commercial lighting /Office lighting					




Match with (0.6/1.2/1.8/2.4/3.0m) length of luminaire
NJG-V8280-32A

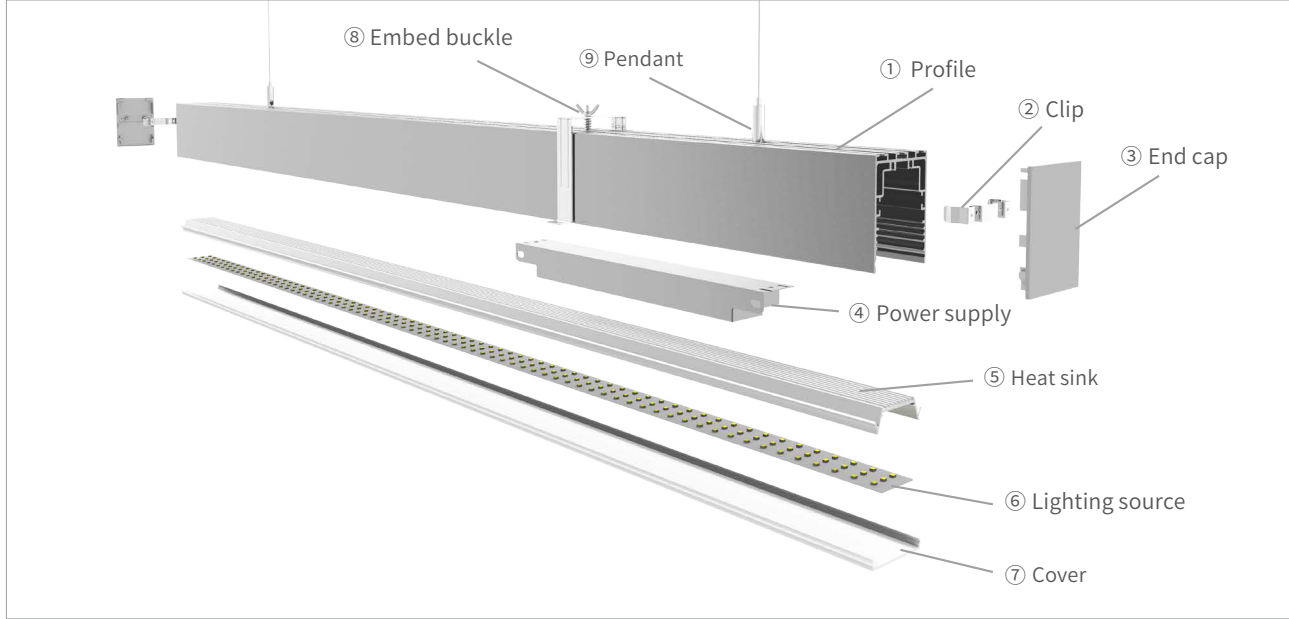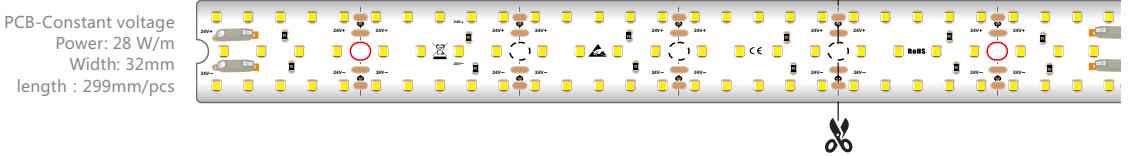

MATO
LS7578S





 Silver	 Black	 White (ral9016)
Material:	AL6063-T5	
Surface:	Anodized/ Painting	
Cover:	Diffuser /Transparent /Opal	
Power:	40 W/m	
Lamp beads:	210LEDs/m (2835)	
Lighting source width:	58 mm	
Available lengths:	0.5-2.5M	
Application:	Commercial lighting /Office lighting	

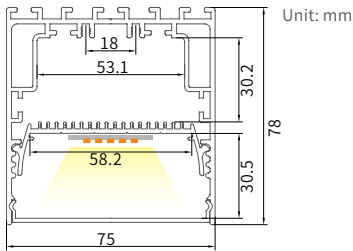

Match with (0.6/1.2/1.8/2.4/3.0m) length of luminaire
NJG-V8420-58A


PCB-Constant voltage
Power: 40 W/m
Width: 58mm
length : 299mm/pcs

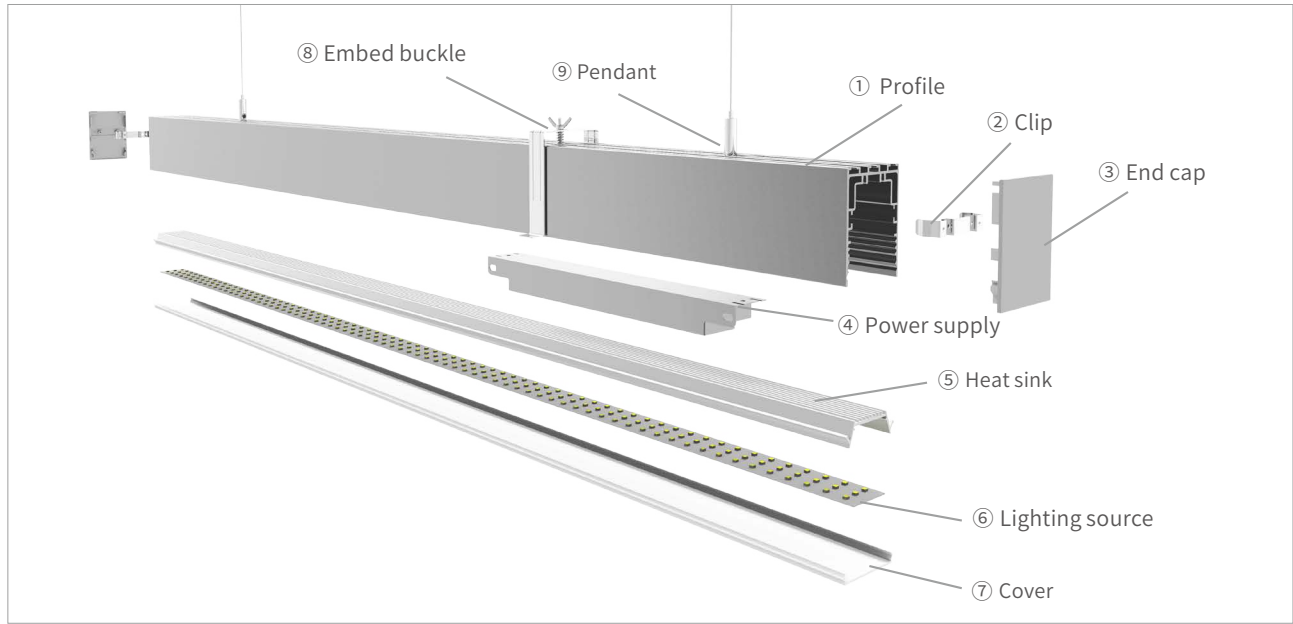


SOTO
LS17032S



 Silver	 Black	 White (ral9016)
Material:	AL6063-T5	
Surface:	Anodized/ Painting	
Cover:	Diffuser /Transparent /Opal	
Power:	40 W/m	
Lamp beads:	210LEDs/m (2835)	
Lighting source width:	50 mm	
Available lengths:	0.5-3M	
Application:	Commercial lighting /Office lighting	


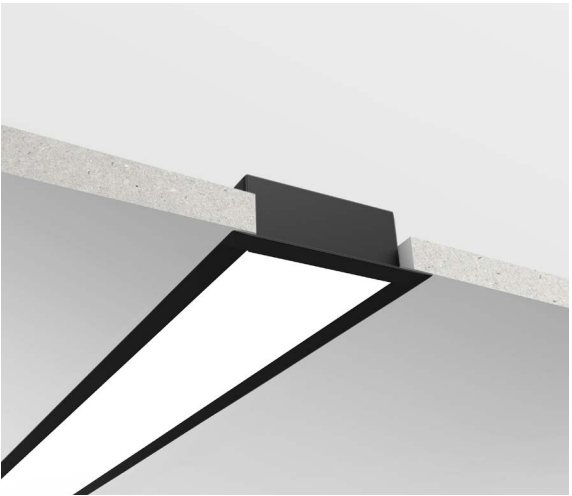


Unit: mm



Match with(1.0/1.2/1.5/1.8/2.0/2.5/3.0m) length of luminaire
NJG-V8420-50

FPC-Constant voltage
Power: 40 W/m
Width: 0.05m
length: 2.5m/reel

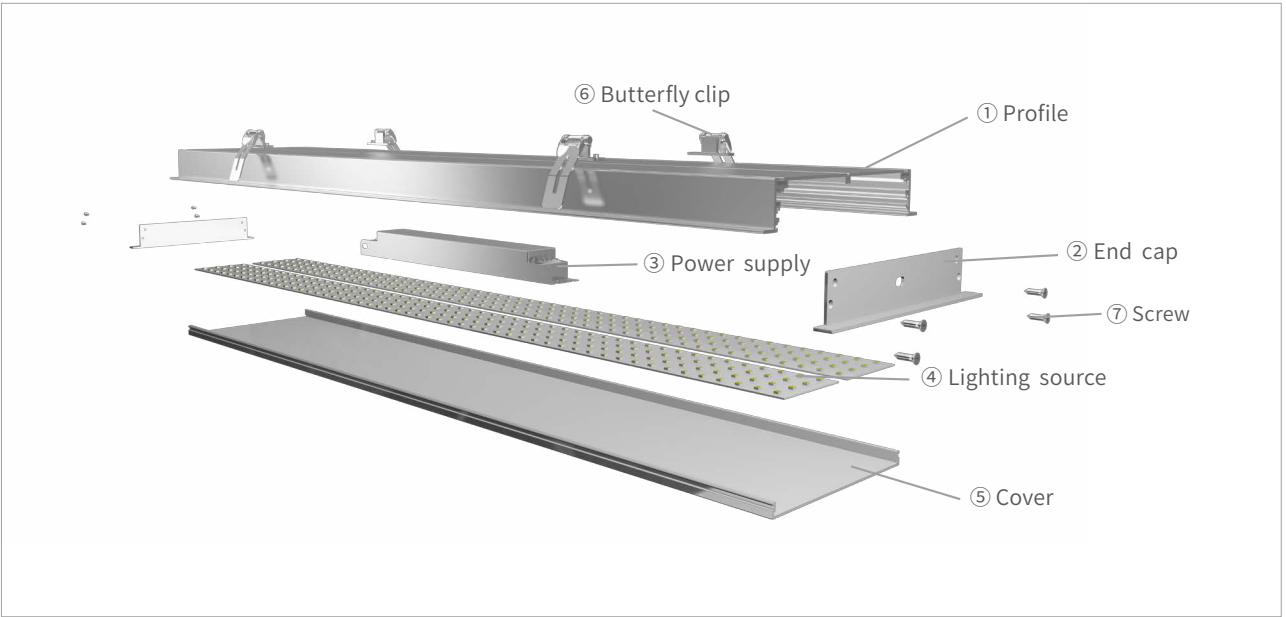


SURO


LS6236S- II

- Silver
- Black
- White (ral9016)

Material: AL6063-T5
Surface: Anodized/ Painting
Cover: Diffuser /Transparent /Opal
Power: 25 W/m
Lamp beads: 140LEDs/m (2835)
Lighting source width: 23 mm
Available lengths: 0.5-3M
Application: Commercial lighting /Office lighting

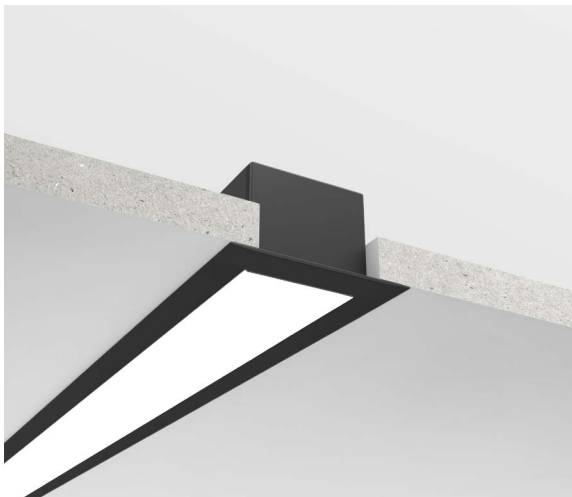


Unit: mm



Match with (1.0/1.2/1.5/1.8/2.0/2.5/3.0m) length of luminair e
NJG-23X500X1 12C6B

PCB-Constant current
Power: 25 W/m
Width: 0.023m
length: 0.49m/pcs




AIRO


LS6260S

- Silver
- Black
- White (ral9016)

Material: AL6063-T5
Surface: Anodized/ Painting
Cover: Diffuser /Transparent /Opal
Power: 25 W/m
Lamp beads: 140LEDs/m (2835)
Lighting source width: 23 mm
Available lengths: 0.5-3M
Application: Commercial lighting /Office lighting



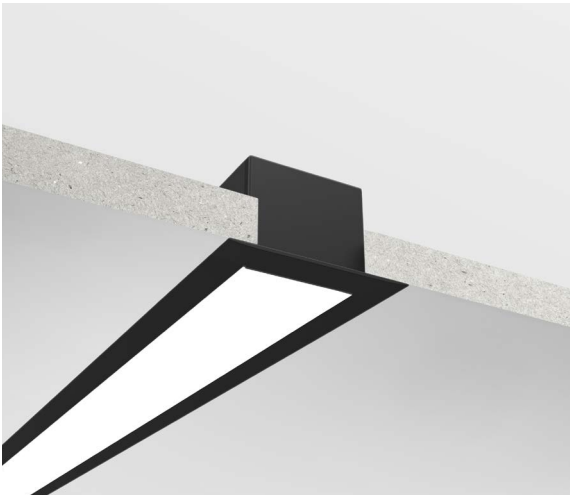


Unit: mm



Match with (1.0/1.2/1.5/1.8/2.0/2.5/3.0m) length of luminair e
NJG-23X500X1 12C6B



PCB-Constant current
Power: 25 W/m
Width: 0.023m
length: 0.49m/pcs

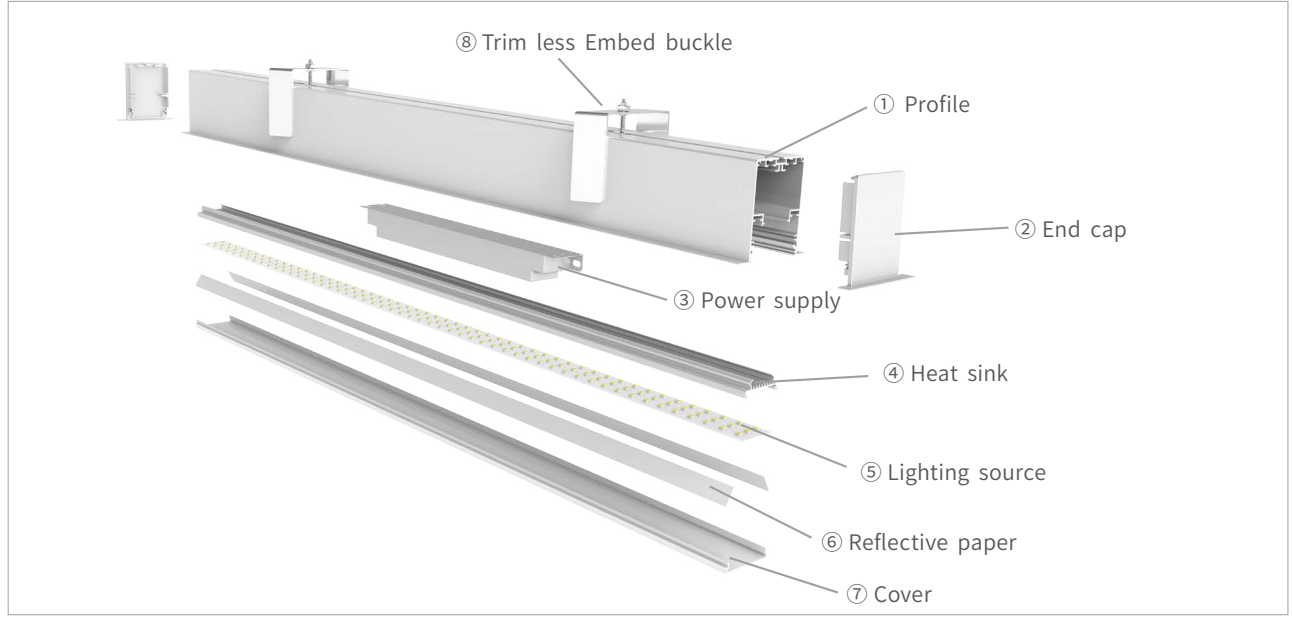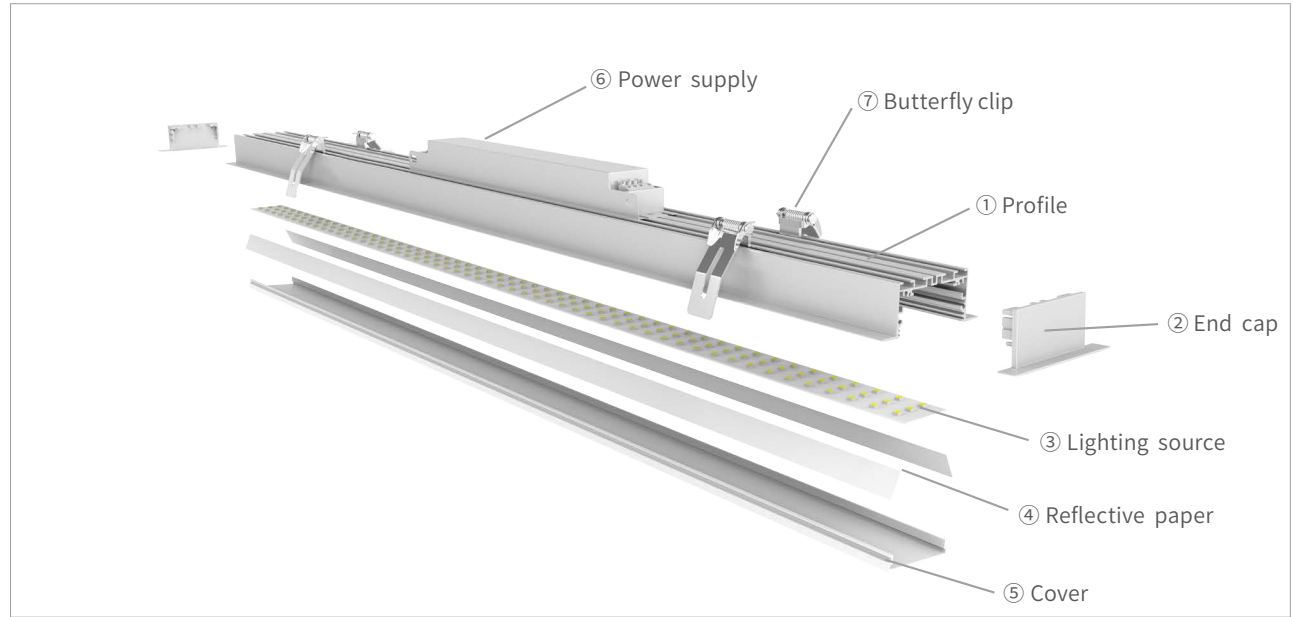



MURO
LS7236S

Silver Black White (ral9016)

Material: AL6063-T5
Surface: Anodized/ Painting
Cover: Diffuser /Transparent /Opal
Power: 28 W/m
Lamp beads: 140LEDs/m (2835)
Lighting source width: 32 mm
Available lengths: 0.5-2.5M
Application: Commercial lighting /Office lighting

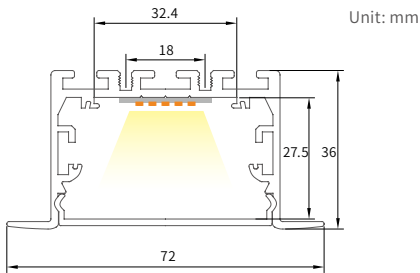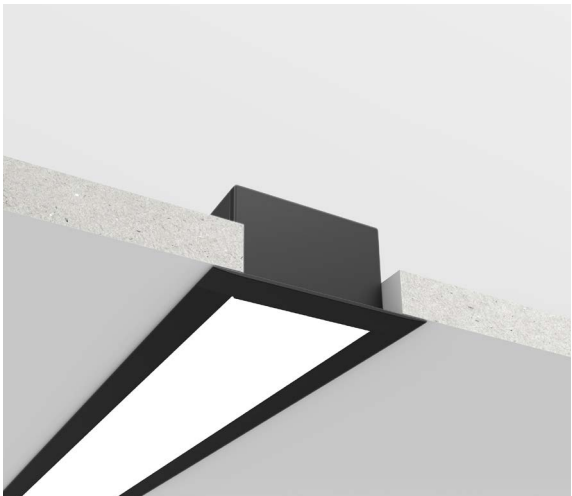



Match with (0.6/1.2/1.8/2.4/3.0m) length of luminaire
NJG-V8280-32A

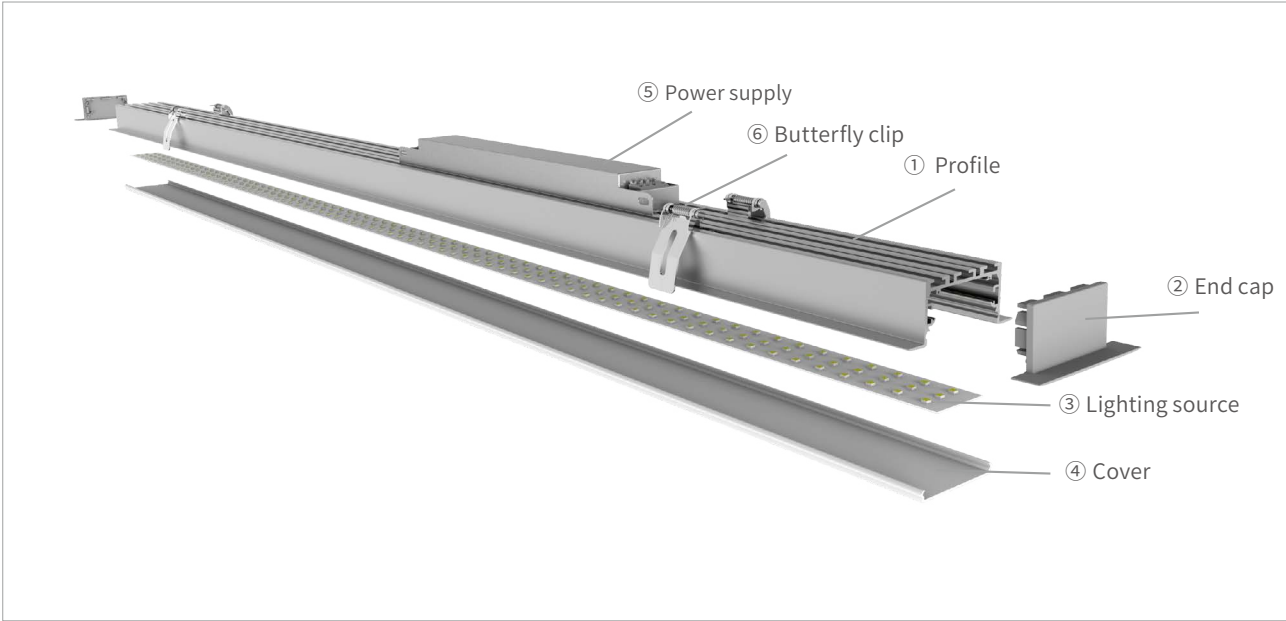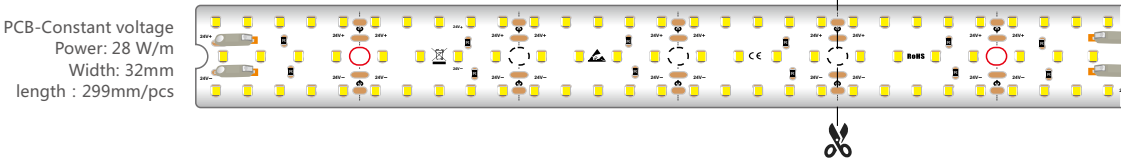



KARO
LS9636S

Silver Black White (ral9016)

Material: AL6063-T5
Surface: Anodized/ Painting
Cover: Diffuser /Transparent /Opal
Power: 40 W/m
Lamp beads: 200LEDs/m (2835)
Lighting source width: 35 mm
Available lengths: 0.5-2.5M
Application: Commercial lighting /Office lighting

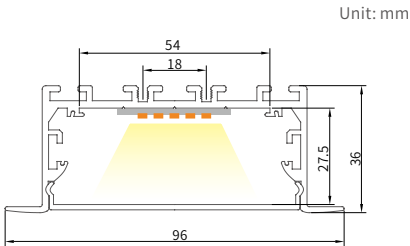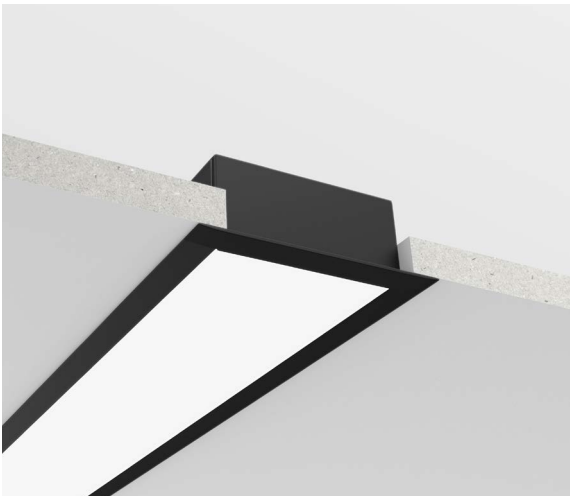


Match with (0.6/1.2/1.8/2.4/3.0m) length of luminaire
NJG-V8420-53A

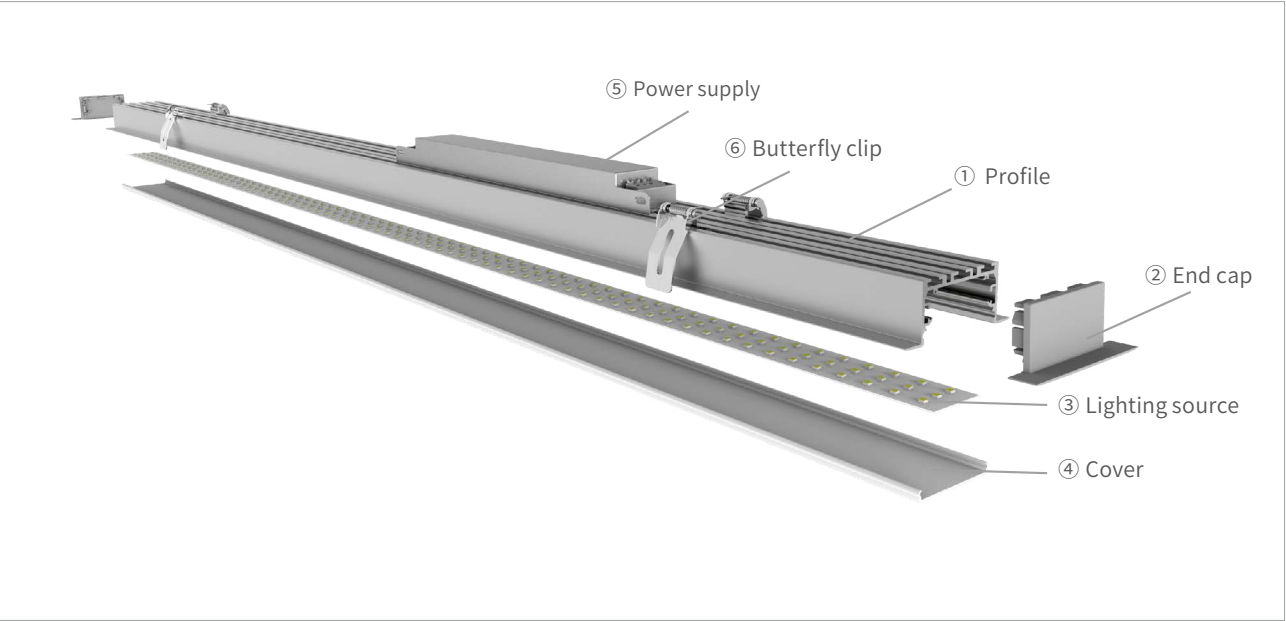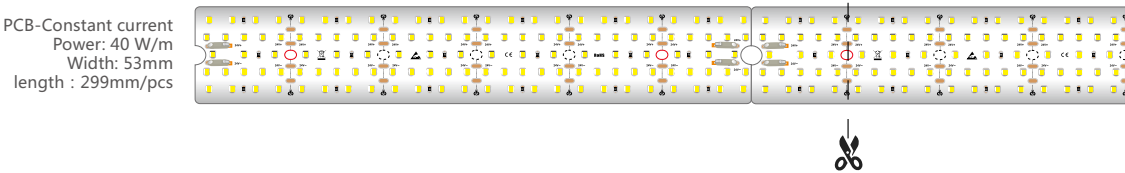



INSTALLATION METHODS

Pendant installation diagram

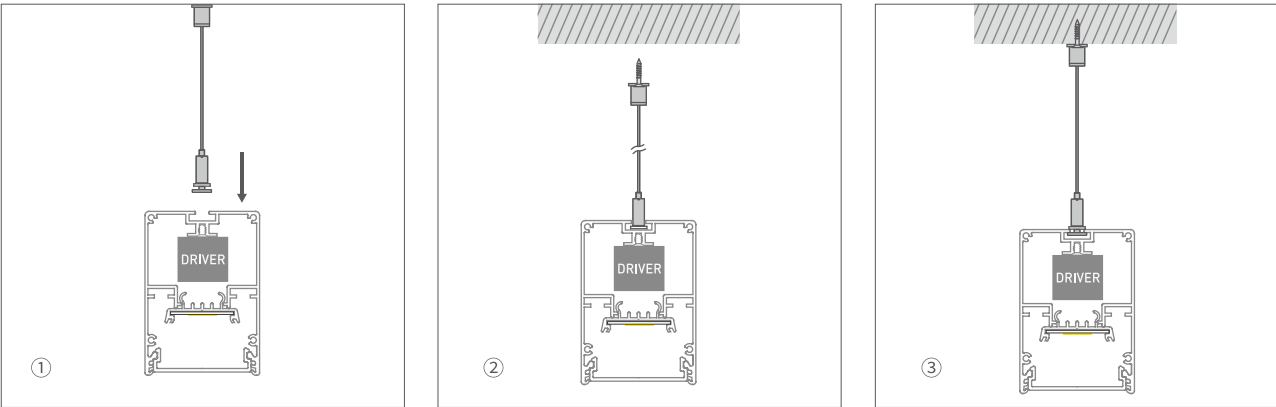

- ① Cord installed to profile
- ② Nail into the ceiling
- ③ Complete fixed



Recessed installation diagram

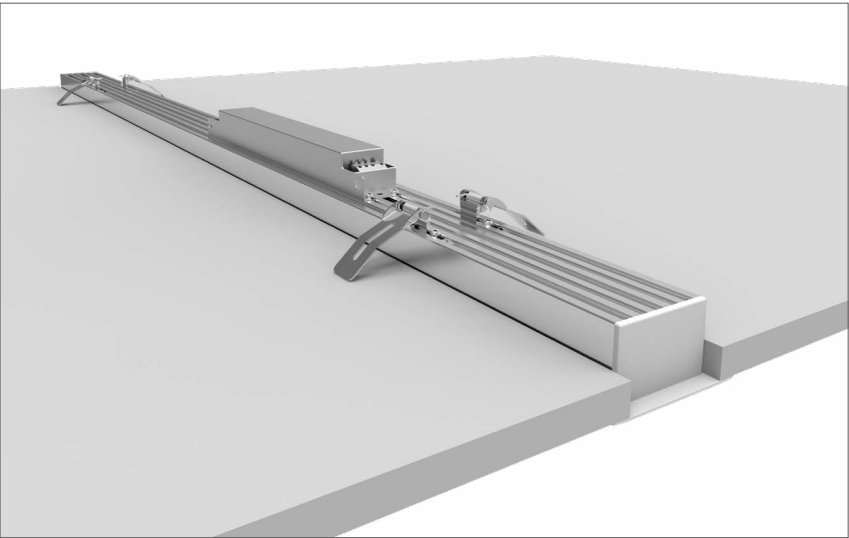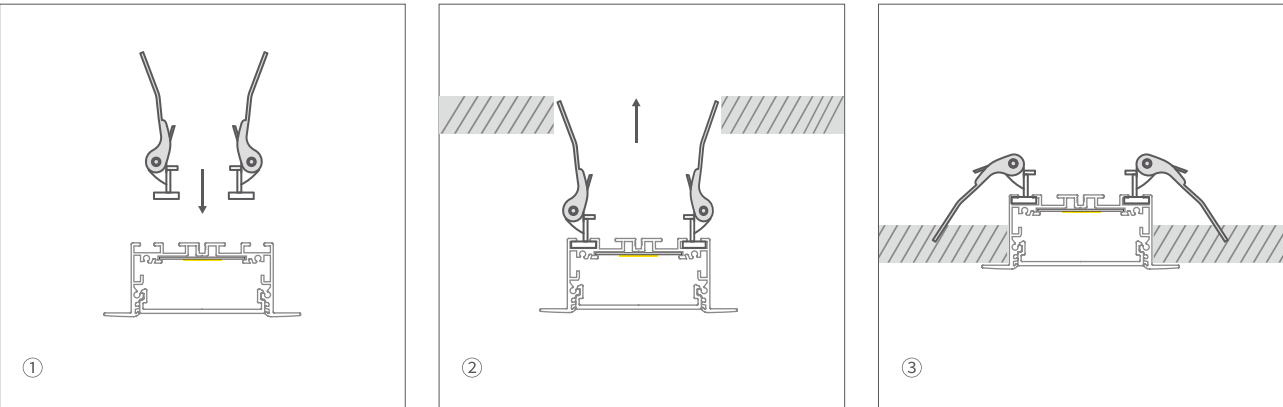

- ① Clip installed to profile
- ② Push into the slot
- ③ Complete fixed



INSTALLATION METHODS

Surface mounted diagram

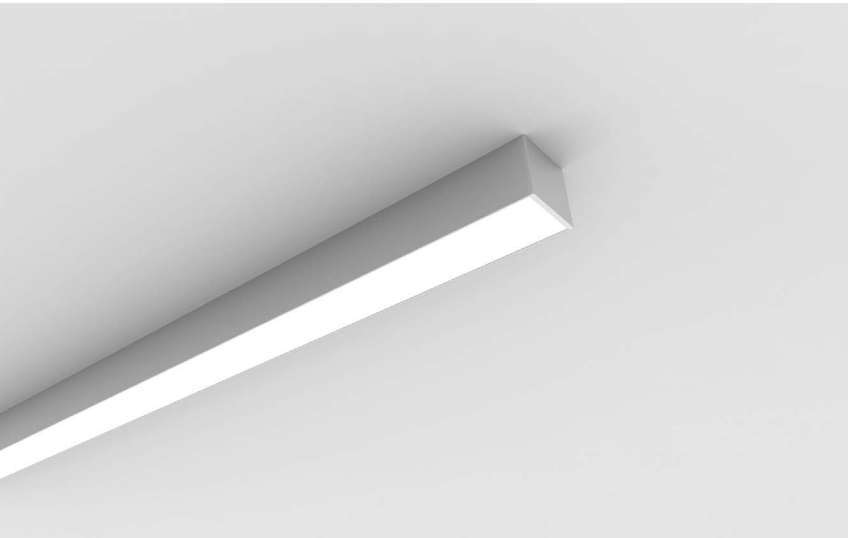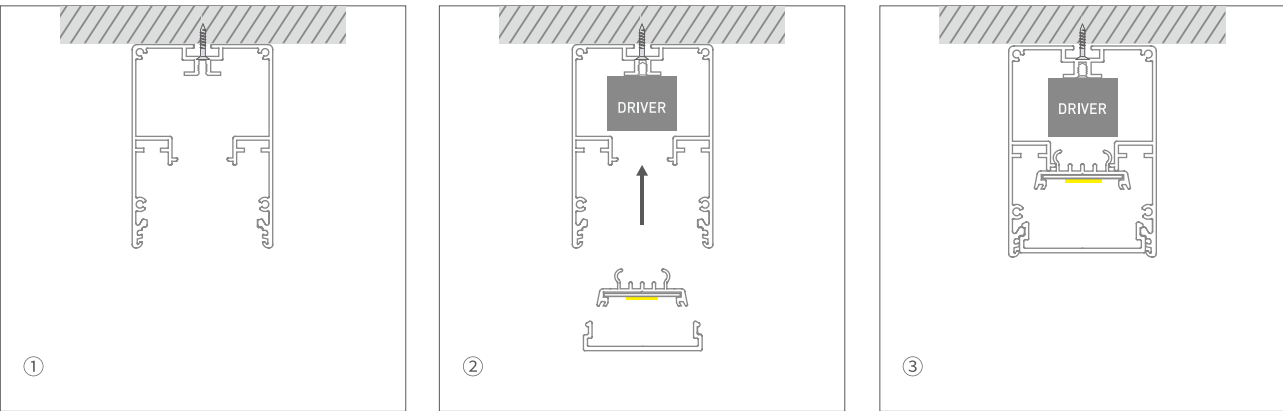

- ① Installation profile to the ceiling
- ② Installation of driver 、 light source 、 PC cover and end cap
- ③ Complete fixed

Wall mounted diagram

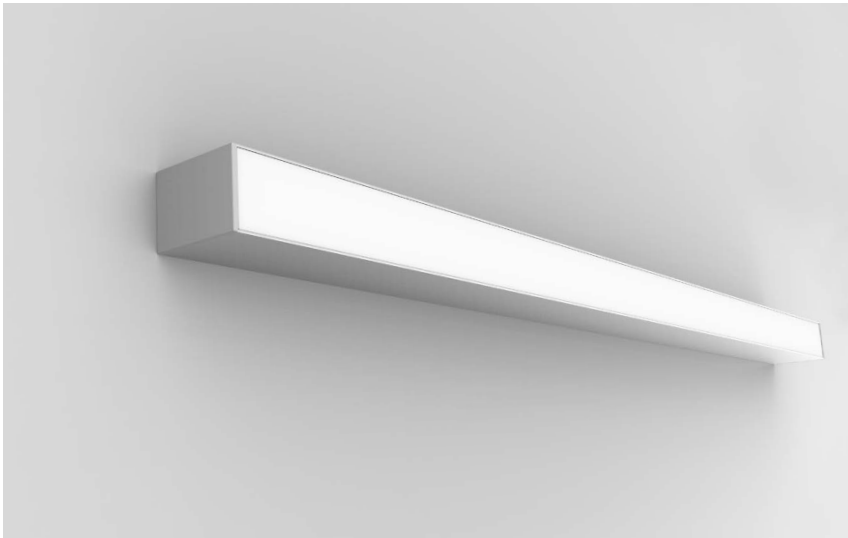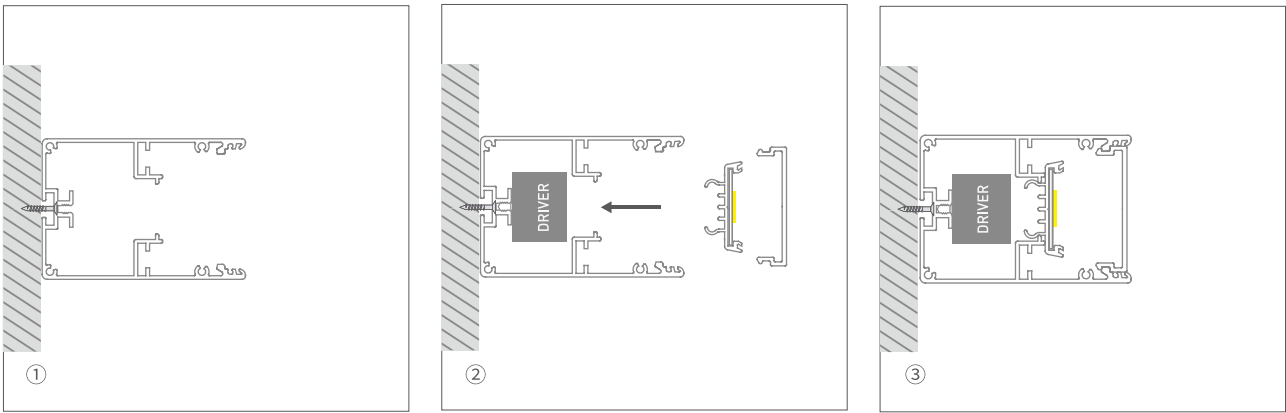


- ① Installation LED profile to wall
- ② Installation of driver 、 light source 、 PC cover and end cap
- ③ Complete fixed





FREE ARC

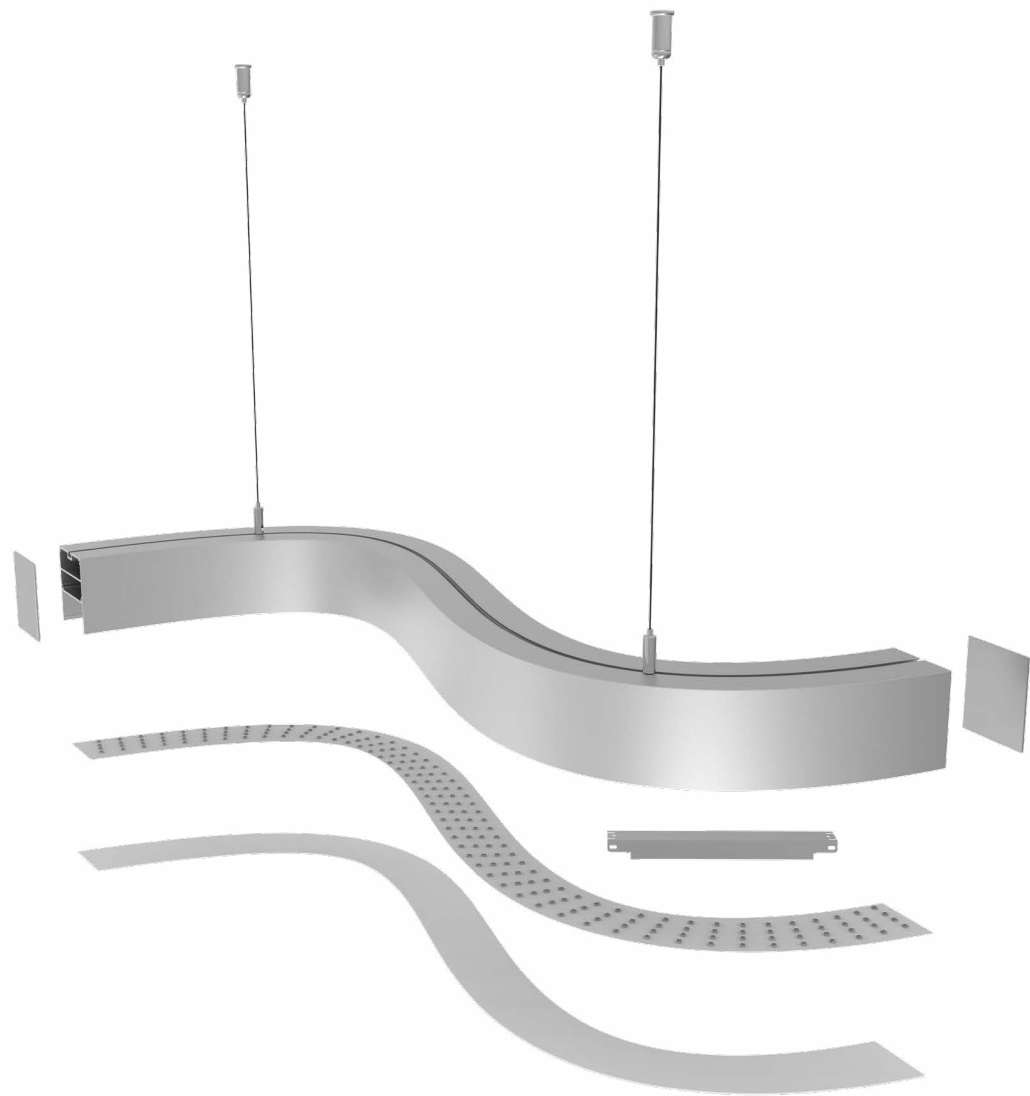




CASPAR CHRIS



SITO
LS5390A

	Silver		Black		White (ra19016)
Material:		AL6063-T5			
Surface:		Anodized/ Painting			
Cover:		PC/Silicone			
Power:		36W/m			
Lamp beads:		60LEDs/m (2835)			
Lighting source width:		40 mm			
Available diameter:		Ø>1m			
Application:		Commercial lighting /Office lighting			



Unit: mm

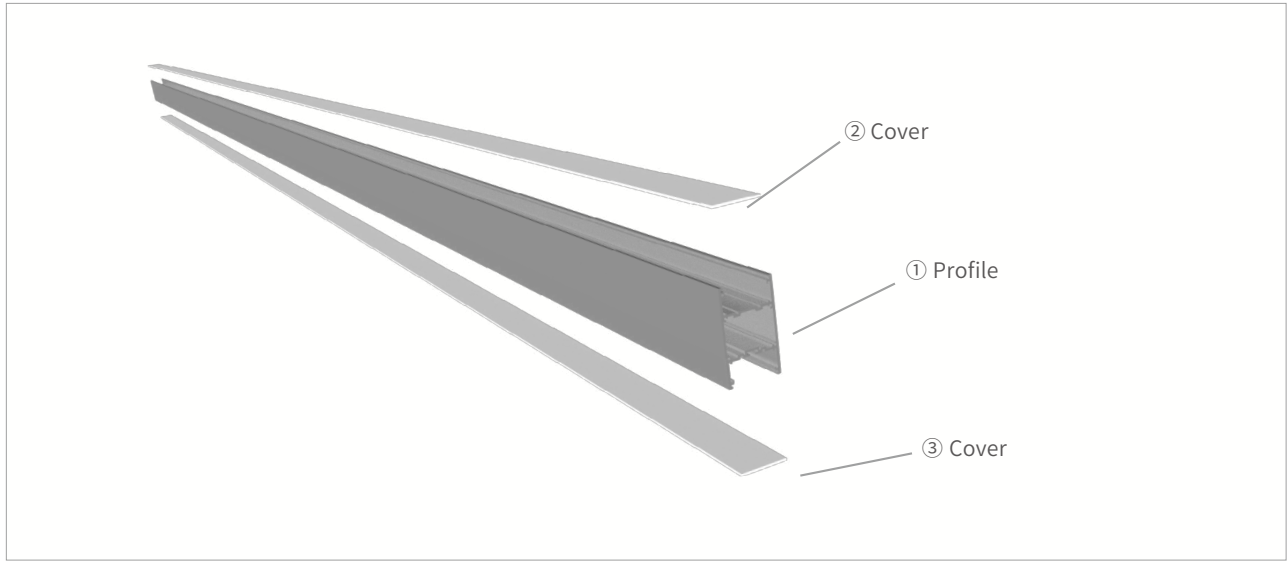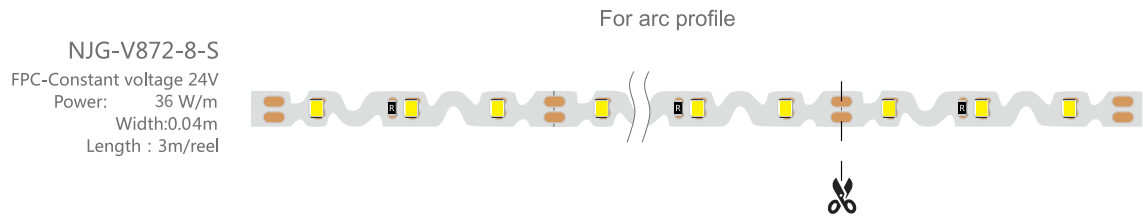



ZITO
LS3916R

	Silver		Black		White (ral9016)
Material:		AL6063-T5			
Surface:		Anodized/ Painting			
Cover:		PC			
Power:		28.8W/m			
Lamp beads:		60LEDs/m [2835]			
Lighting source width:		30 mm			
Available diameter:		Ø>1m			
Application:		Commercial lighting /Office lighting			

Unit: mm



Ø =1.0m/1.2m/2.0m/3.0m/4.0m/5.0m

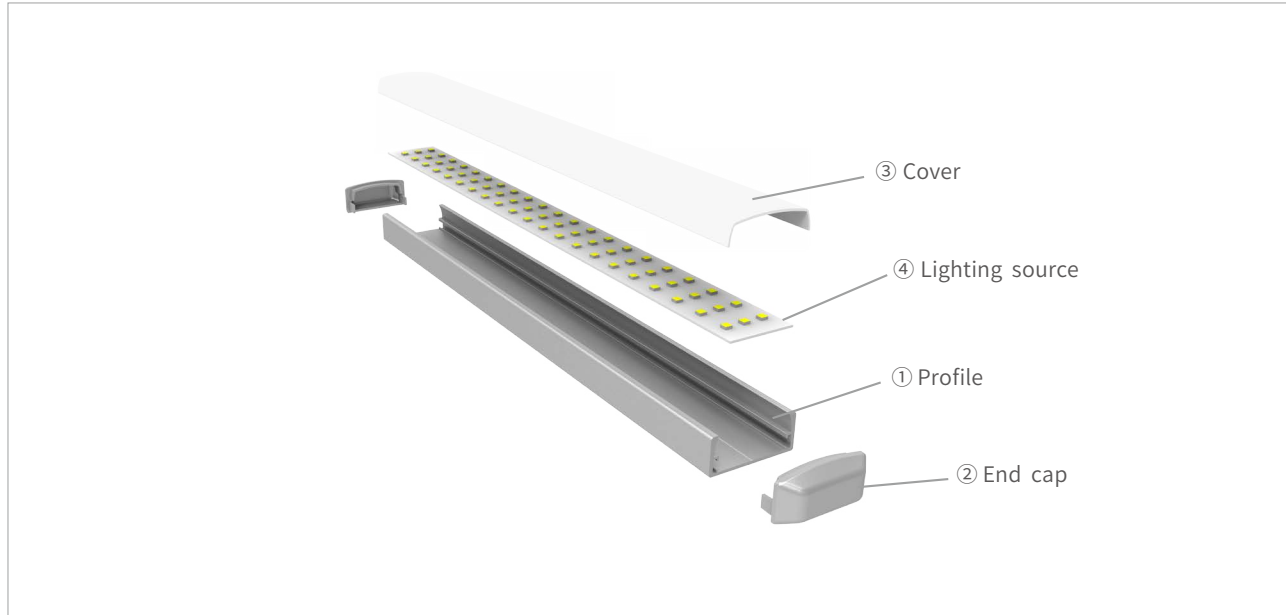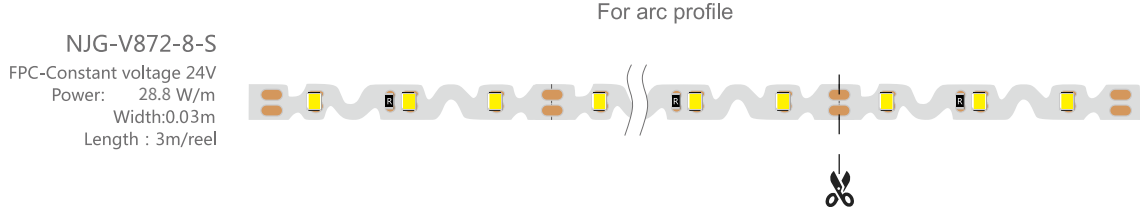


SLIMMER
LS3235A- II



■ Silver ■ Black ■ White (ral9016)



Material: AL6063-T5
Surface: Anodized/ Painting
Cover: PC/Silicone
Power: 20W/m
Lamp beads: 60LEDs/m (2835)
Lighting source width: 18 mm
Available diameter: Ø>1m
Application: Commercial lighting /Office lighting

Unit: mm



For arc profile

NJG-V872-8-S
FPC-Constant voltage 24V
Power: 24V-7.2 W/m
Width:0.008m
Length : 3m/reel

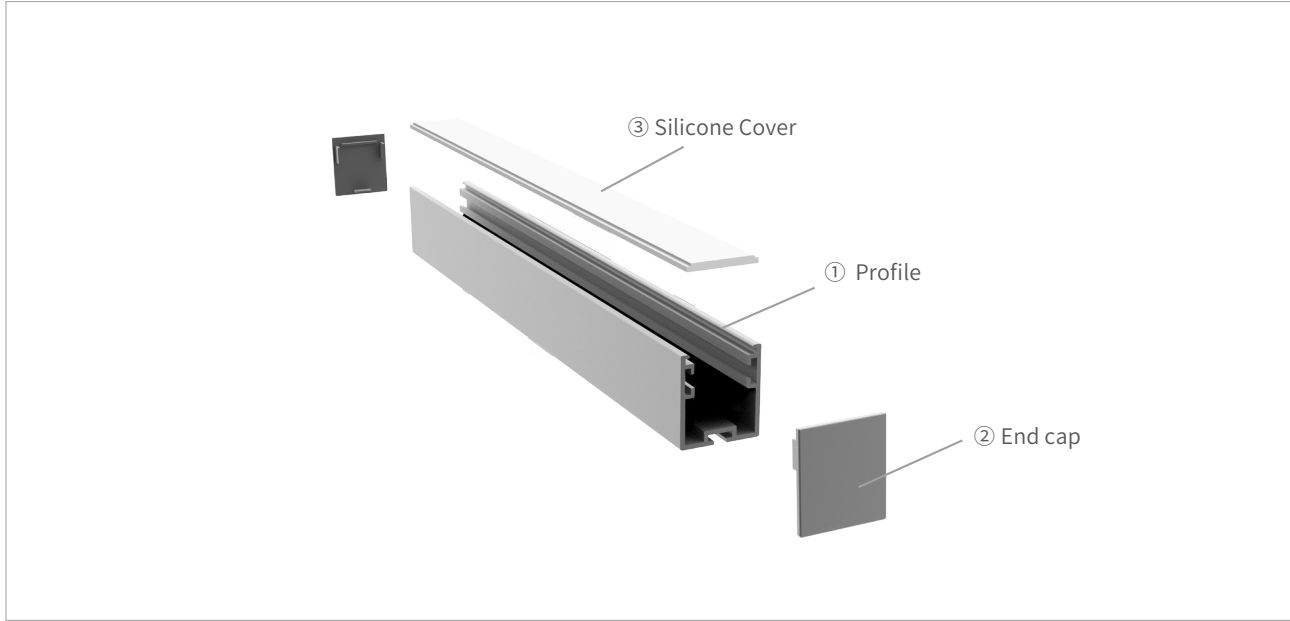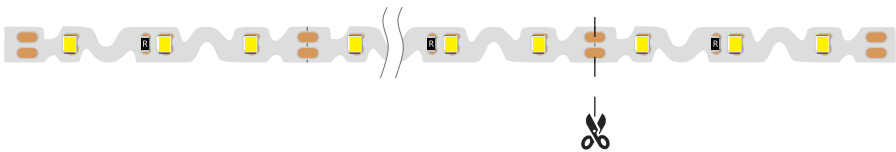


MAGICAL
LS6070A- II



■ Silver ■ Black ■ White (ral9016)



Material: AL6063-T5
Surface: Anodized/ Painting
Cover: PC/Silicone
Power: 40W/m
Lamp beads: 60LEDs/m (2835)
Lighting source width: 50 mm
Available diameter: Ø>1m
Application: Commercial lighting /Office lighting

Unit: mm





For arc profile

NJG-V872-8-S
FPC-Constant voltage 24V
Power: 24V-7.2 W/m
Width:0.008m
Length : 3m/reel

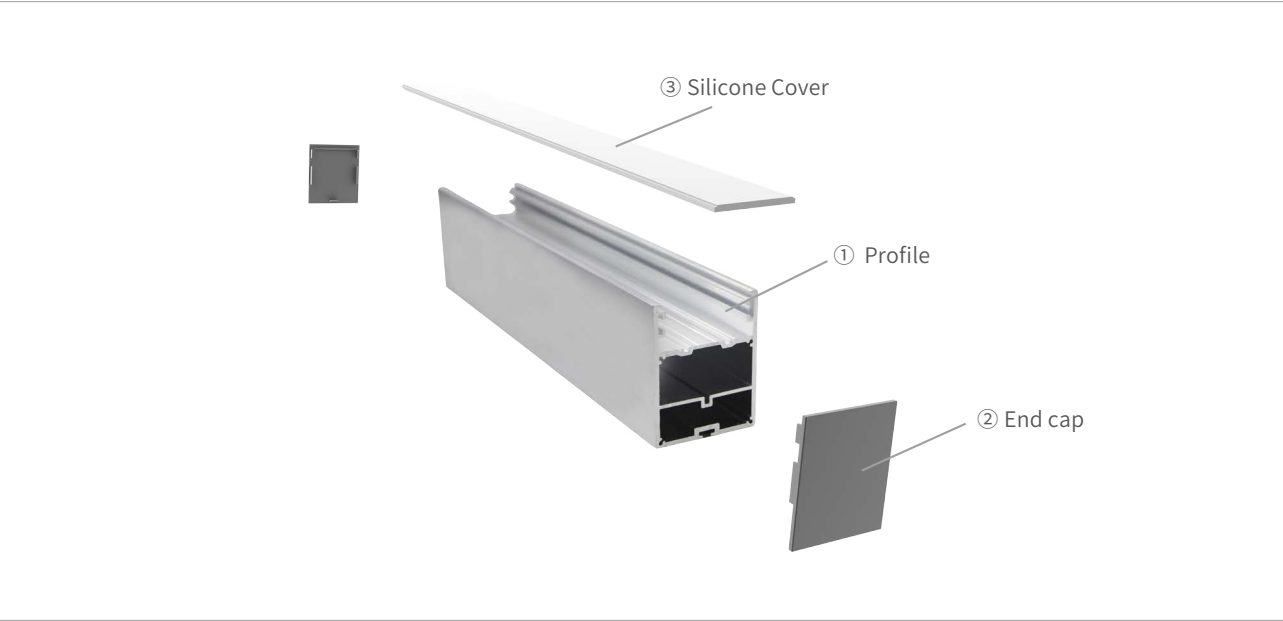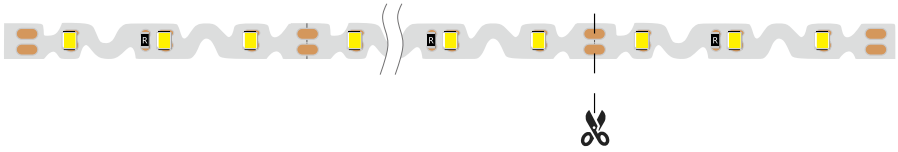


INSTALLATION METHODS

Pendant installation diagram













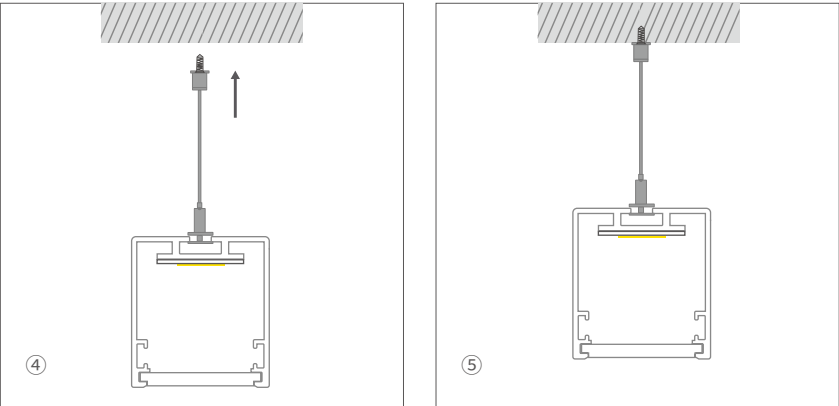
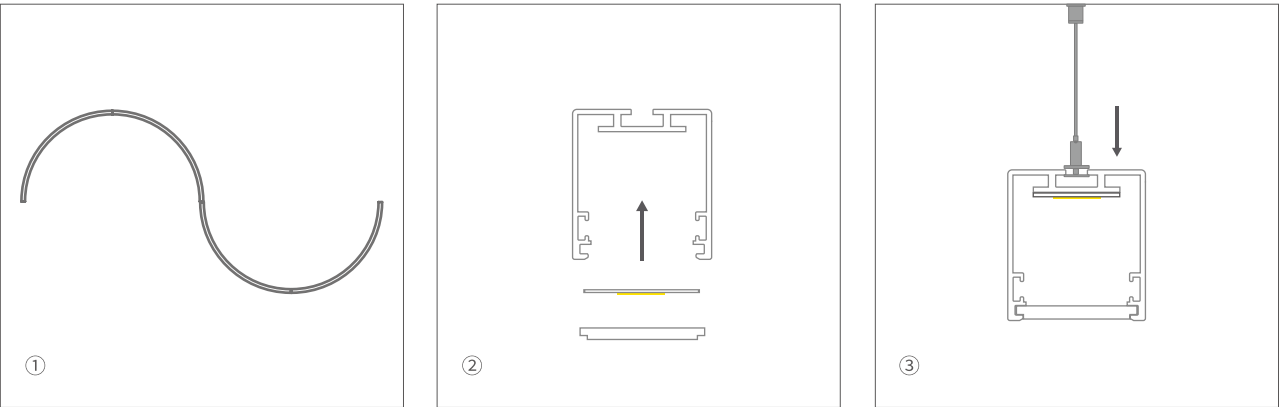


- ① Splicing of model
- ② Installation of light source, PC cover and end cap
- ③ Cord installed to profile
- ④ Nail into the ceiling
- ⑤ Complete fixed

Other splicing methods

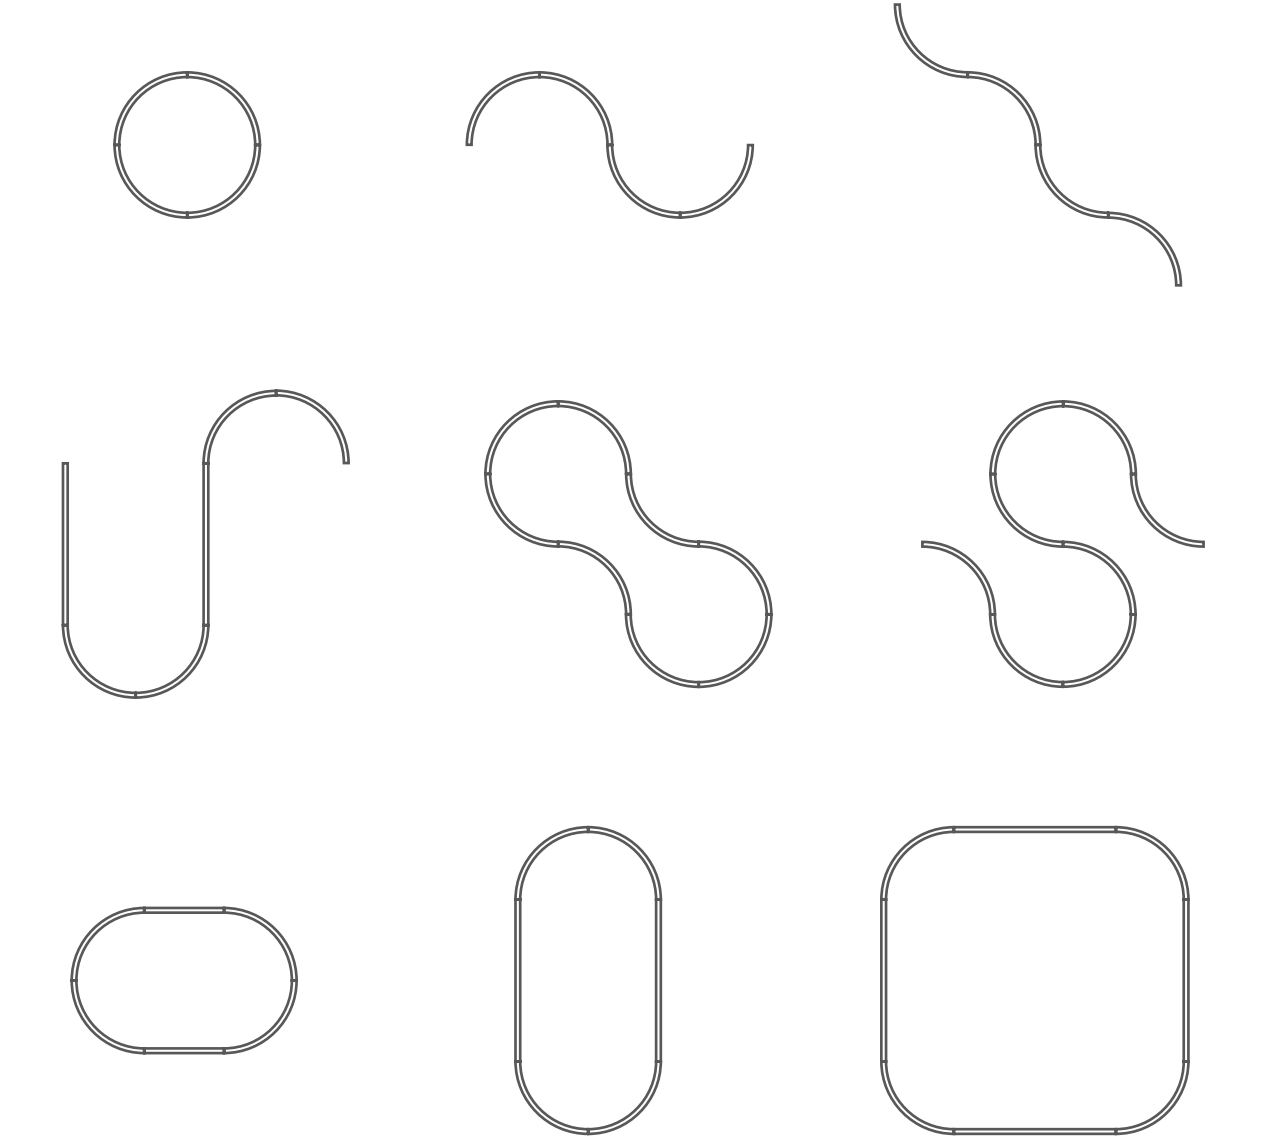


PRODUCT
CODE

Model	Picture	Size	Exterior color			Installation	Power	LED-FPC	LED-PCB	Accessories (cover seamless connector)					
LS5186S		51*86*2000mm					20W	NJG-V8240-18 20W/m	NJG-C8200-20-5C20B						
LS6884S		68*84*2000mm					20W	NJG-V8240-18 20W/m	NJG-C8200-20-5C20B						
LS15032S		150*32*2000mm					20W	NJG-V8240-18 20W/m	NJG-C8200-20-5C20B						
LP8085S		80*85*2000mm					80W	NJG-V8280-72 80W/m	NJG-60X500X1-12C20B						
LS5270S		52*70*2000mm					28W	NJG-V8420-28 28W/m	NJG-C8280-32-7C20B						
LS7578S		75*78*2000mm					40W	NJG-V8420-50 40W/m	NJG-C8400-58-10C20B						
LS17032S		170*32*2000mm					20W	NJG-V8240-18 20W/m	NJG-C8200-20-5C20B						
LS6236S- II		62*36*2000mm					25w	NJG-2835A-18 25W/m	NJG-23X500X1-12C6B						
LS6260S		62*60*2000mm					25W	NJG-2835A-18 25W/m	NJG-23X500X1-12C6B						
LS7236S		72*36*2000mm					28W	NJG-V8280-28 28W/m	NJG-C8280-32-7C20B						



PRODUCT
CODE

Model	Picture	Size	Exterior color			Installation	Power	LED-FPC	LED-PCB	Accessories (cover seamless connector)					
LS9636S		96*36*2000mm					40W	NJG-V8420-50 40W/m	NJG-C8400-58-10C20B						
LS5390A		53*90*2000mm					20W	NJG-2835A-18 20W/m	-		-	-		-	5390A-0.25m
LS8090A		80*90*2000mm					40W	NJG-2835A-50 40W/m	-		-	-		-	8090A-0.25m
LS3235A- II		32*35*2000mm					20W	NJG-2835A-18 20W/m	-			-		-	3235A- II -0.25m
LS6070A- II		60*70*2000mm					40W	NJG-2835A-50 40W/m	-		-	-		-	6070A- II -0.25m

